


LASER 60" V3

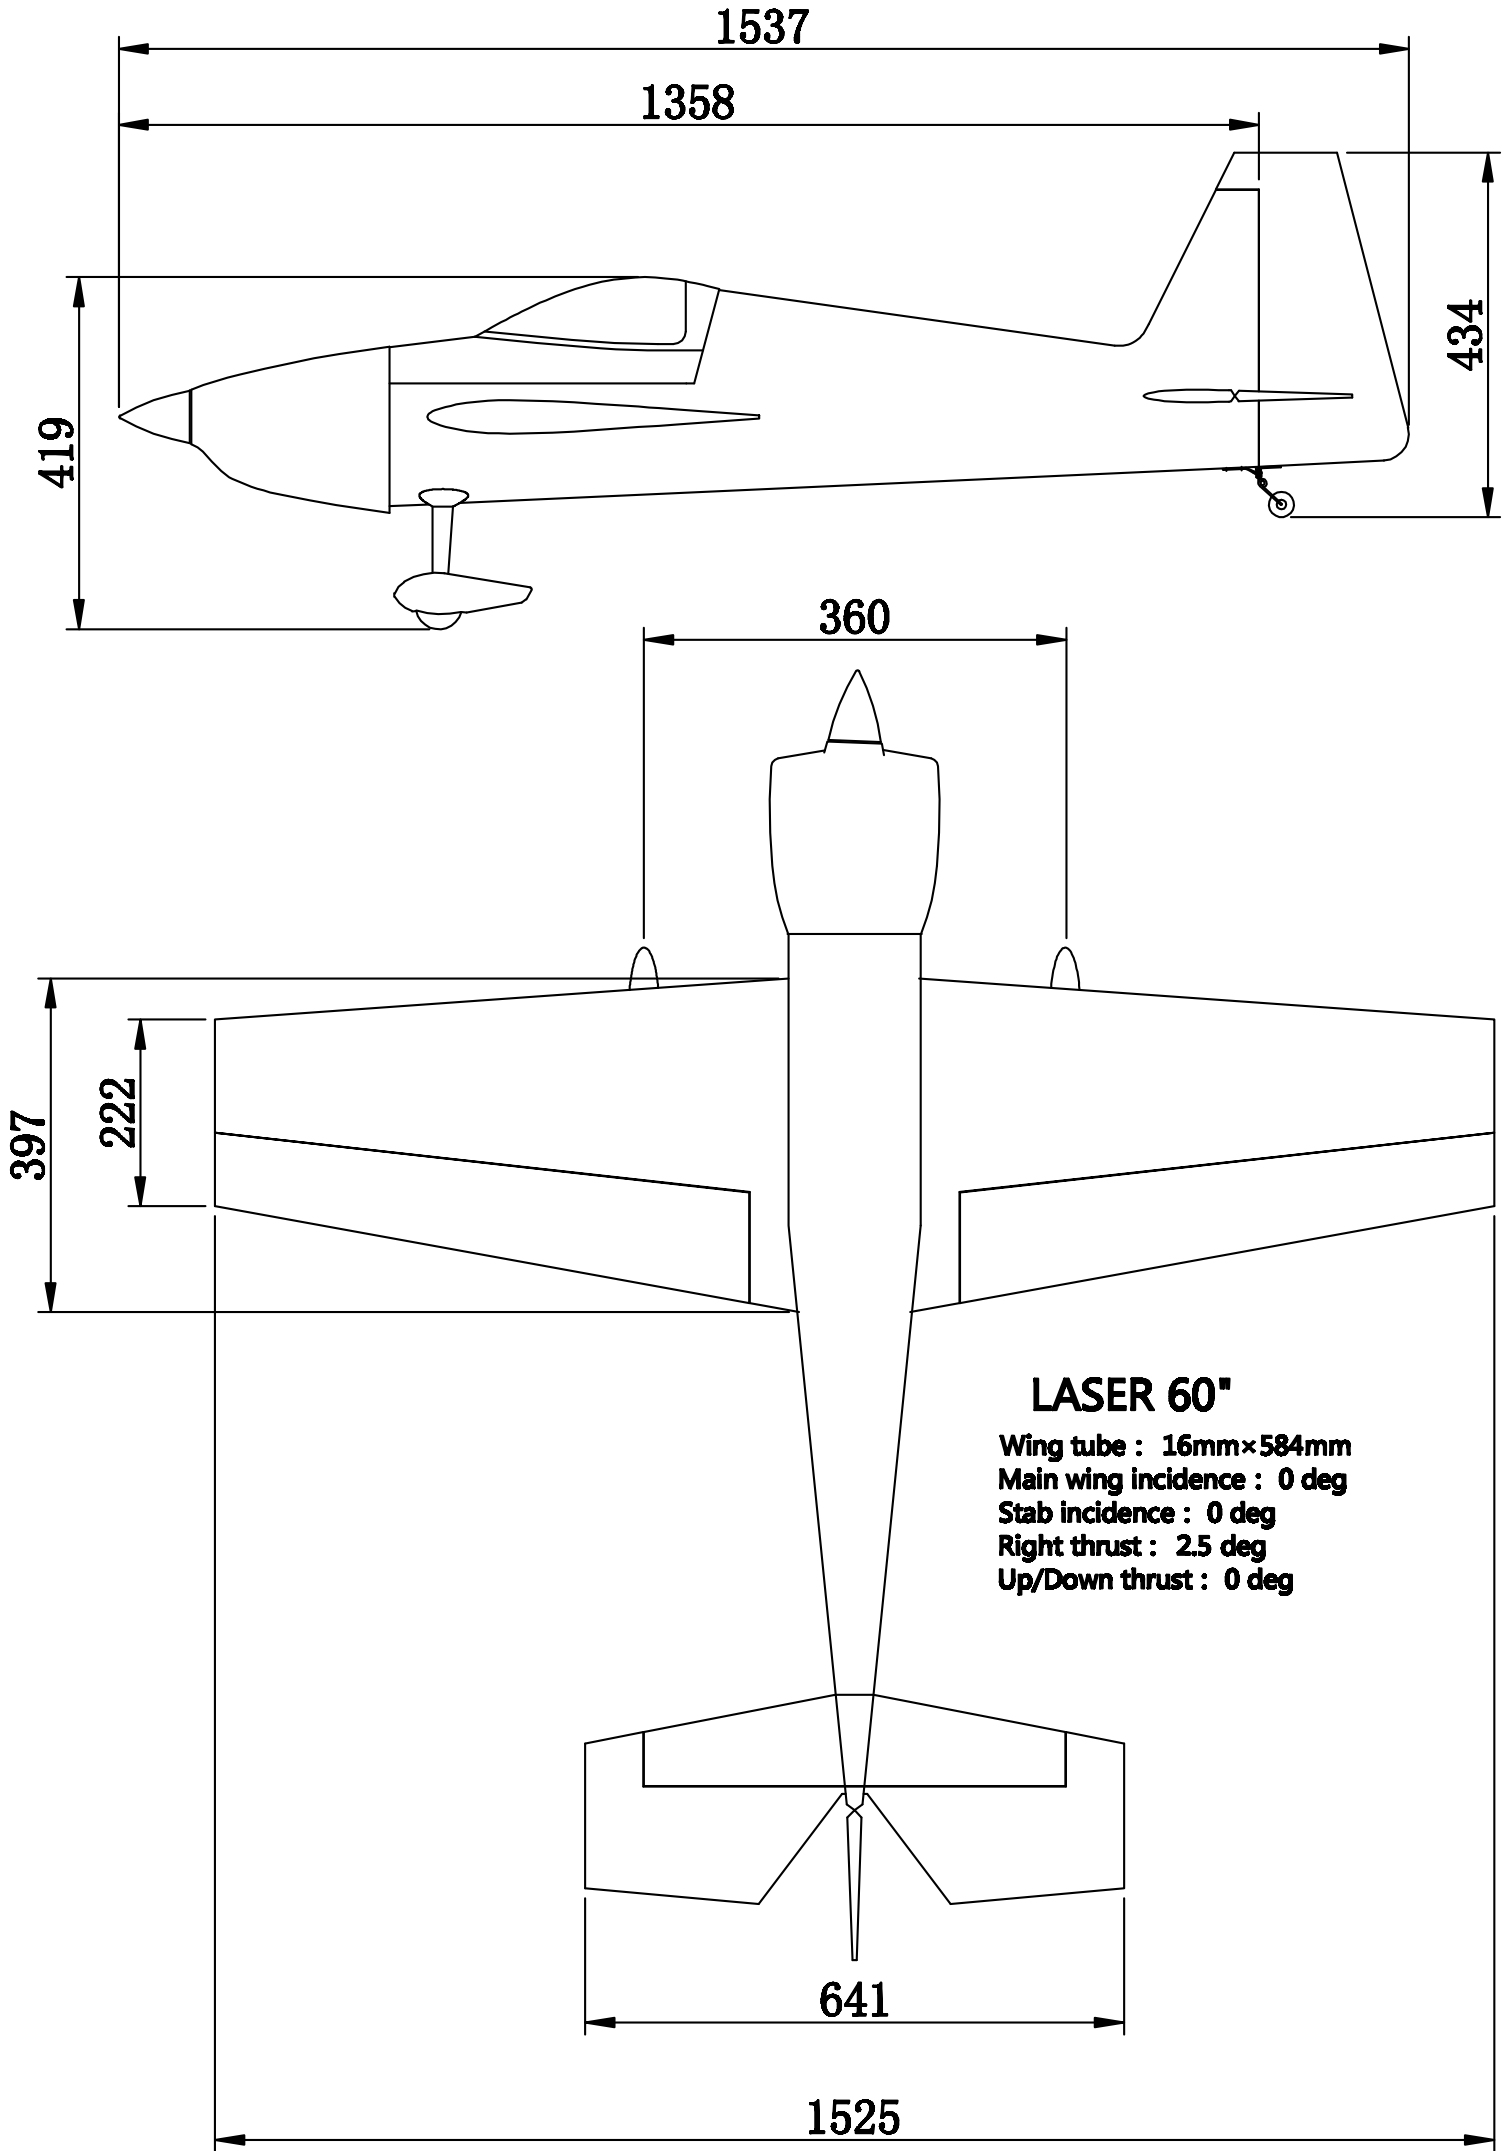

SPECS

WingSpan: 60"
 Length: 61"
 Wing area: 750 sq. in.

Spinner: 63mm
 Weight: 5-6 lb

Center of Gravity: Balance on the wing tube for precision flight or easy sport flying.
 Back of the wing tube to 1/2" behind the tube for 3D flight.

Control settings:

Elevator: Low Rate 8-10 deg. 15-20% expo
 3D Rate 45-50 deg. 60-65% expo
 XA/Tumbling rate 60+ deg. 65-70% expo

Aileron: Low Rate 15-20 deg. 40-45% expo
 High Rate 38-40 deg. 70-75% expo

Rudder: Low Rate 20 deg 40-45% expo
 High Rate 45-50 deg. 80-90% expo

Power system:

XPWR 22cc Motor 16x7-16x8 Wood electric prop

T-Motor AM600 Motor T-Motor 16x8 prop

T-Motor AM116A ESC

Servos:

QTY 4 mini metal gear servos
 SAVOX SV-1261MG, EF/Theta 988

QTY 4 Extreme Flight 1.25" Servo arms

Servo Extensions:

QTY 2 Extreme Flight 24" 28AWG
 QTY 2 Extreme Flight 3" 28AWG

Oracover colors

Ultracote colors

RAL Paint code

White/Blue/Red color scheme:

Silver #91
 Dark Blue #52
 White #10
 Ferrari Red #23
 Sky Blue #53

Silver-#HANU881
 Midnight Blue- # HANU885
 White-# HANU870
 True Red #HANU 866
 Sky Blue #HANU 875

N/A
 RAL5013
 RAL9010
 RAL3000
 RAL5015

Red color scheme:

Dark Blue #52
 White #10
 Ferrari Red #23
 Gold #92

Midnight Blue- # HANU885
 White-# HANU870
 True Red #HANU 866
 Gold #HANU879

RAL5013
 RAL9010
 RAL3000
 N/A

EXTREME FLIGHT X