


YAK-54 60" V2

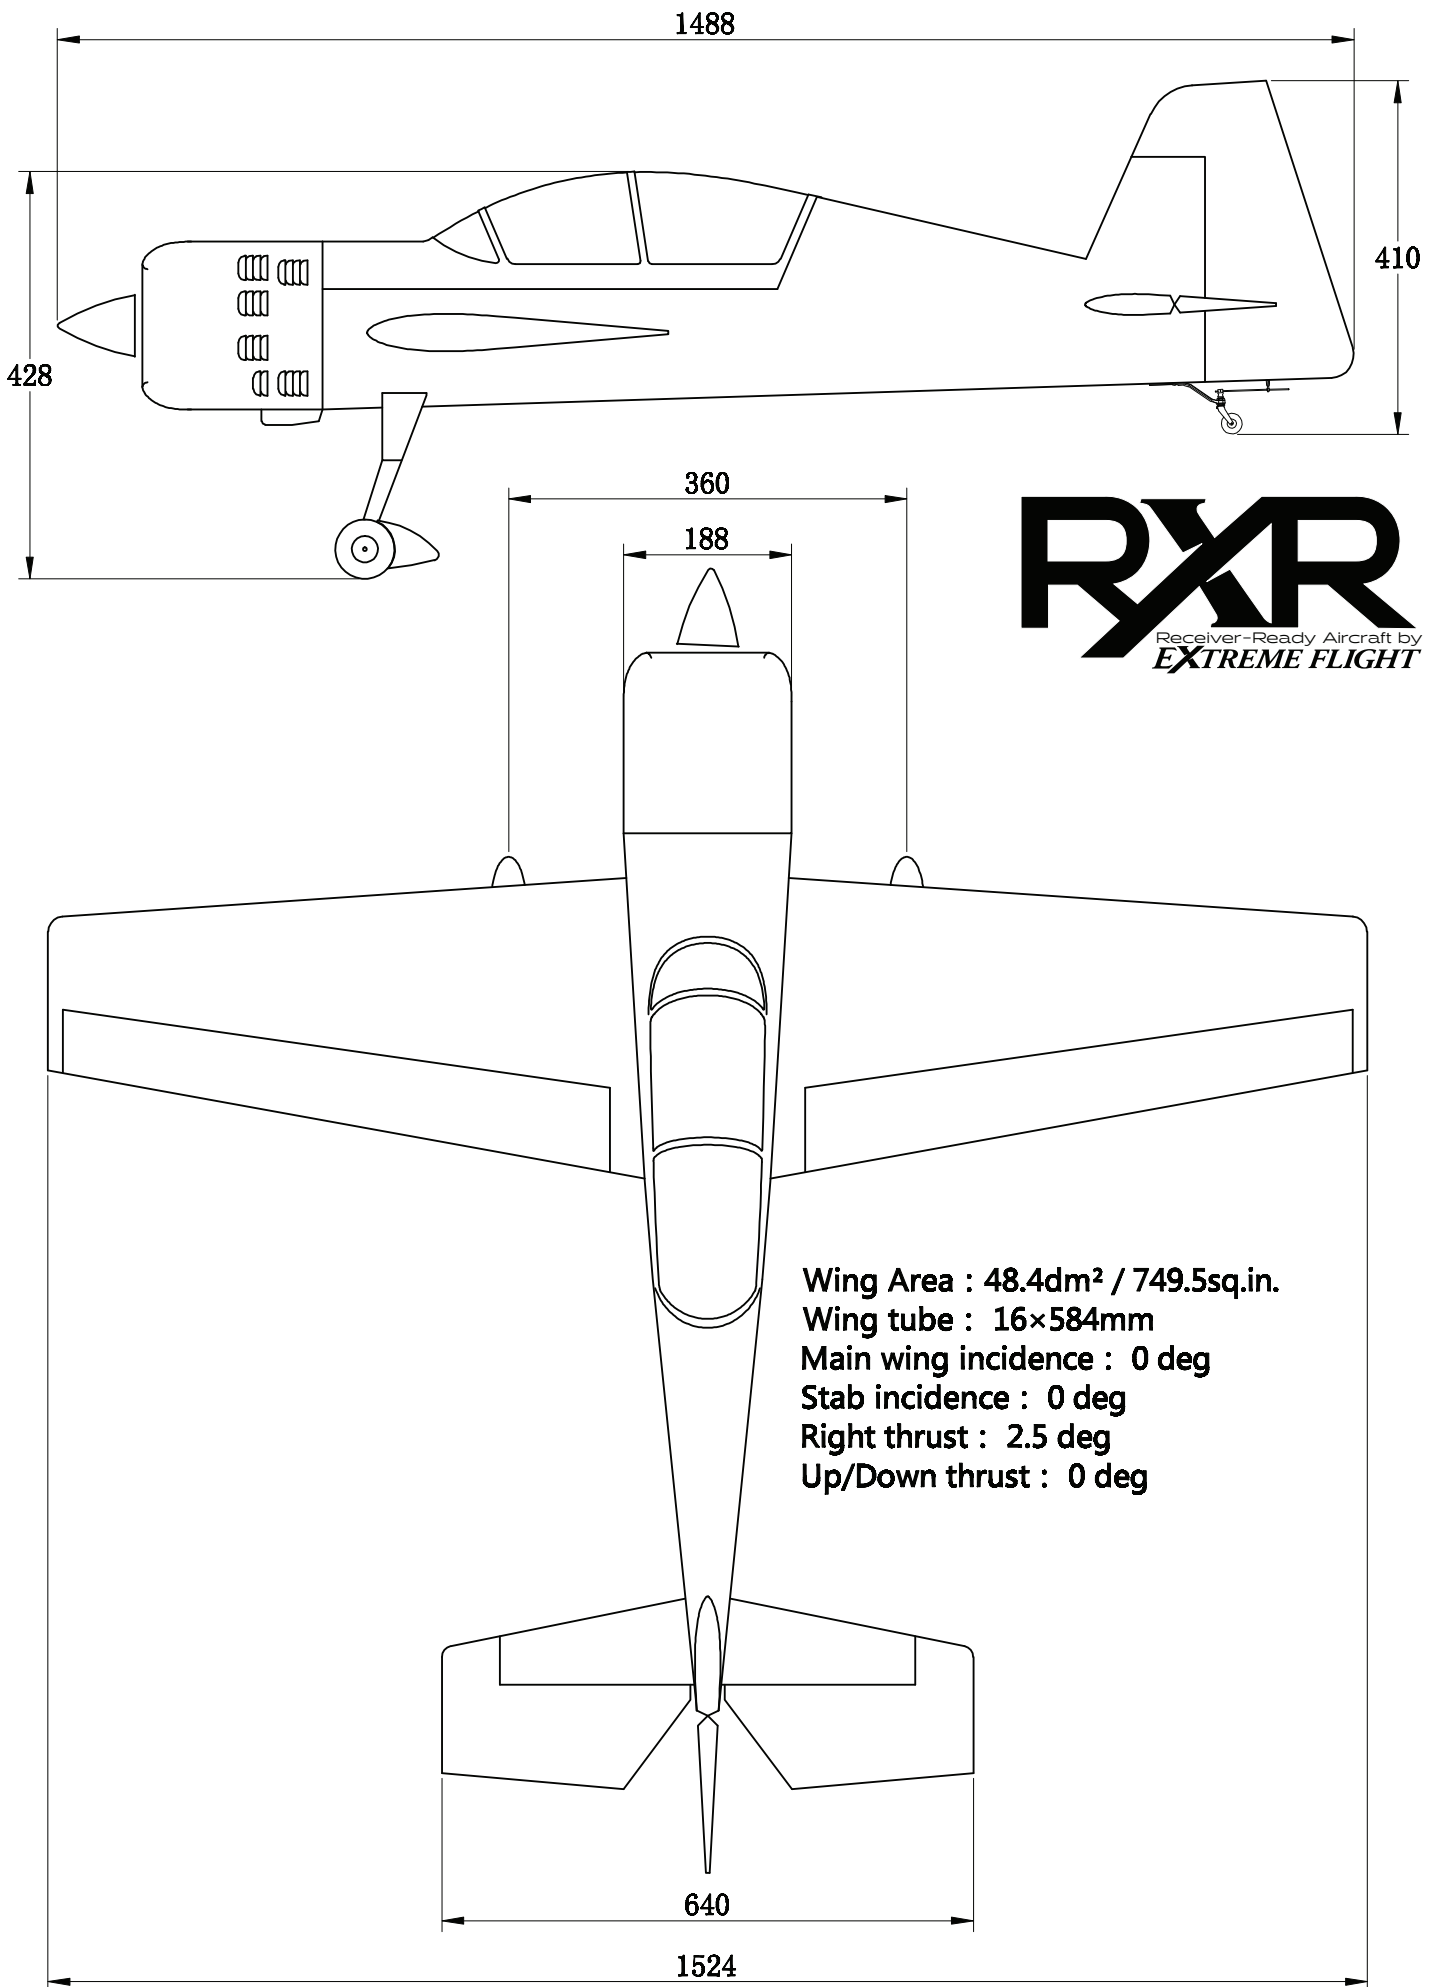

SPECS

WingSpan: 60"
Length: 59"
Wing area: 749 sq. in.

Spinner: 63mm
Weight: 6-6.5 lb

Center of Gravity : Our preferred C of G for maiden flight is at rear edge of the wing tube.

Control settings:

Elevator: Low Rate 8-10 deg. 15-20% expo
3D Rate 45-50 deg. 60-65% expo
XA/Tumbling rate 60+ deg. 65-70% expo

Aileron: Low Rate 15-20 deg. 40-45% expo
High Rate 38-40 deg. 70-75% expo

Rudder: Low Rate 20 deg 40-45% expo
High Rate 45-50 deg. 80-90% expo

Power system:

T-Motor AM600 Motor INSTALLED
T-Motor AM116A ESC INSTALLED
T-Motor 16x8 prop INSTALLED

Requires 6S 3300-4000mah Lipo

Servos:

QTY 4 EF/Theta 988 INSTALLED

QTY 4 Extreme Flight 1.25" Servo arms INSTALLED

COVERING:

Oracover colors	Ultracote colors	RAL Paint code
-----------------	------------------	----------------

Cub Yellow/Red Scheme

Dark Blue #52	Midnight Blue #HANU885	RAL5013
Cub Yellow #30	Cub Yellow #HANU884	RAL1003
Silver #91	Silver #HANU881	N/A
Ferrari Red #23	True Red #HANU 866	RAL3000
White #10	White #HANU870	RAL9010

White/Blue scheme

Silver #91	Silver #HANU881	N/A
White #10	White #HANU870	RAL9010
Dark Blue #52	Midnight Blue #HANU885	RAL5013
Cub Yellow #30	Cub Yellow #HANU884	RAL1003

EXTREME FLIGHT X