


SLICK580 60"

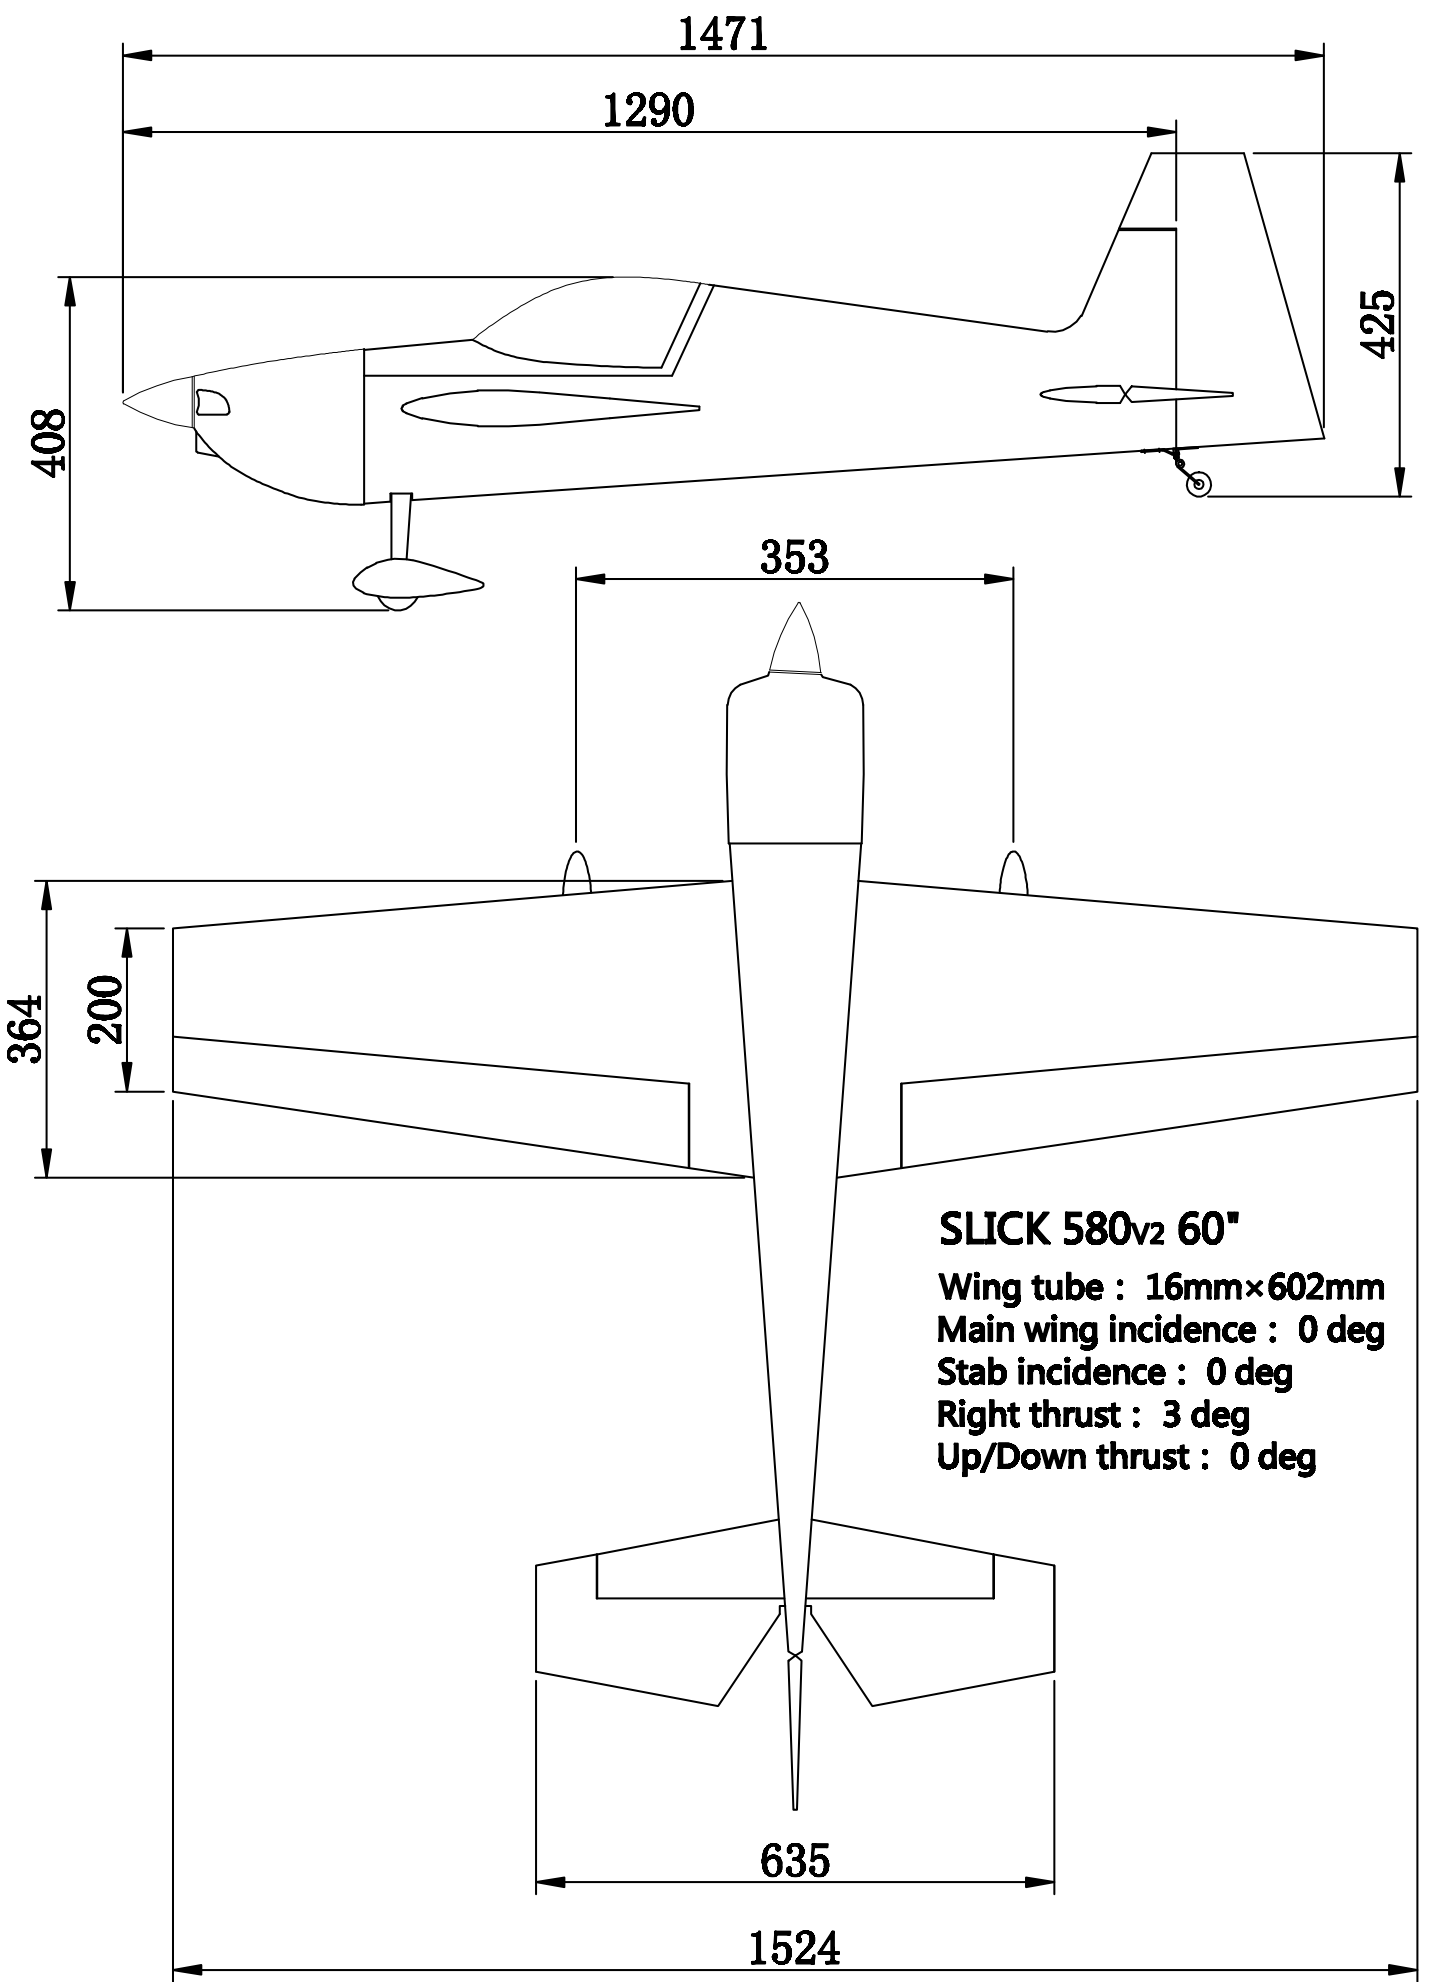

SPECS

WingSpan: 60" Spinner: 63mm
Length: 58" Weight: 6-6.5 lb
Wing area: 670 sq. in.

Center of Gravity : Our preferred C of G for maiden flight is at rear edge of the wing tube.

Control settings:

Elevator: Low Rate 8-10 deg. 15-20% expo
3D Rate 45-50 deg. 60-65% expo
XA/Tumbling rate 60+ deg. 65-70% expo

Aileron: Low Rate 15-20 deg. 40-45% expo
High Rate 38-40 deg. 70-75% expo

Rudder: Low Rate 20 deg 40-45% expo
High Rate 45-50 deg. 80-90% expo

Power system:

T-Motor AM600 Motor INSTALLED

T-Motor AM116A ESC INSTALLED

T-Motor 16x8 prop INSTALLED

Servos:

QTY 4 EF/Theta 988 INSTALLED

QTY 4 Extreme Flight 1.25" Servo arms INSTALLED

COVERING:

Oracover colors

Ultracote colors

Yellow/Red/Grey Scheme

Light Grey #11
Cub Yellow #30
Black #71
Ferrari Red #23

Grey #HANU882
Cub Yellow #HANU884
Black #HANU874
True Red #HANU 866

Blue/White/Orange scheme

#60 orange
#53 sky blue
#10 white
#52 dark blue

Orange #HANU 877
Sky Blue #HANU 875
White #HANU 870
Midnight blue#HANU 885