
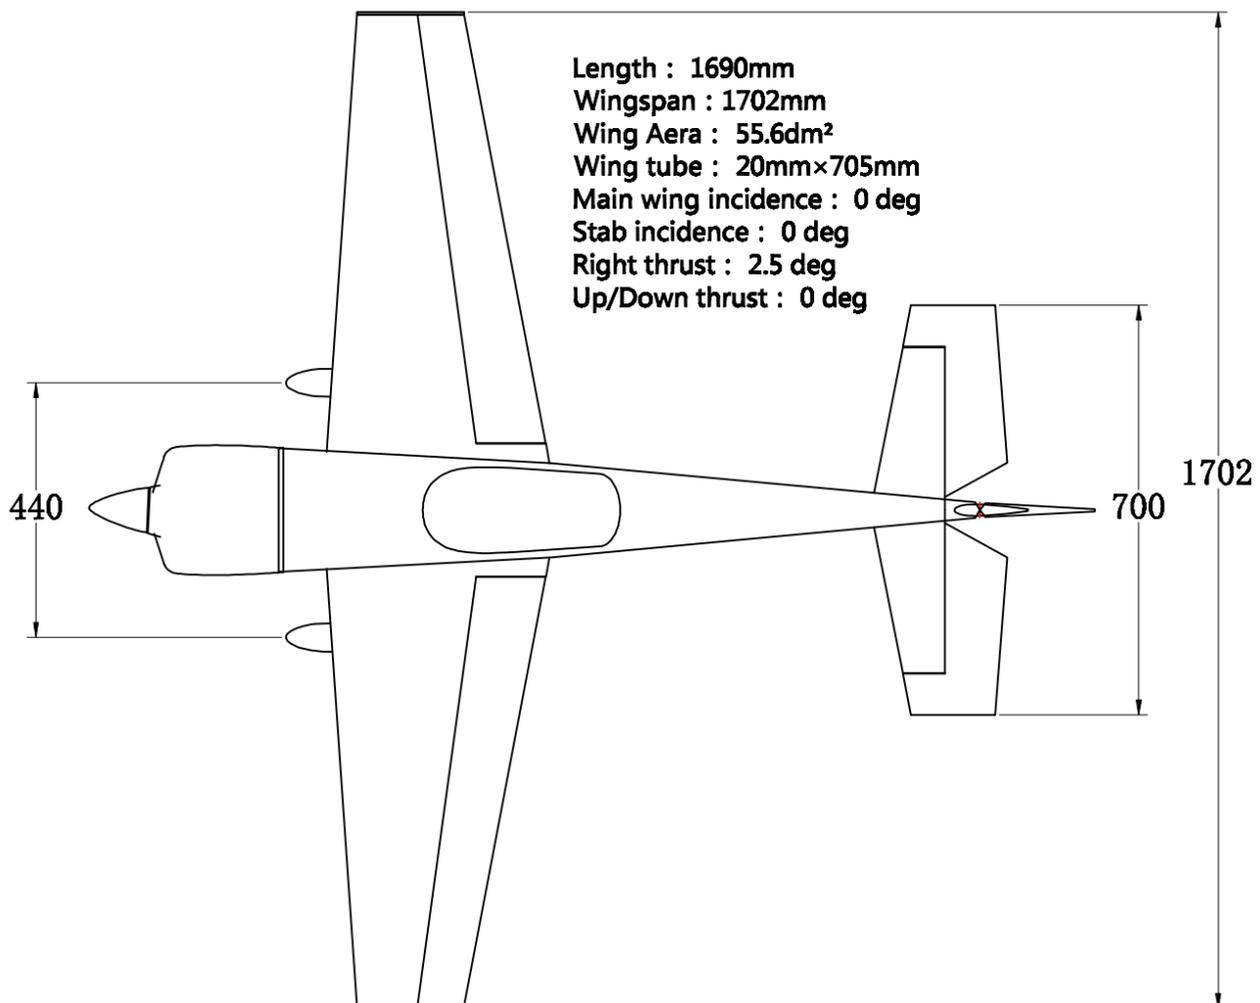


67" Slick 580

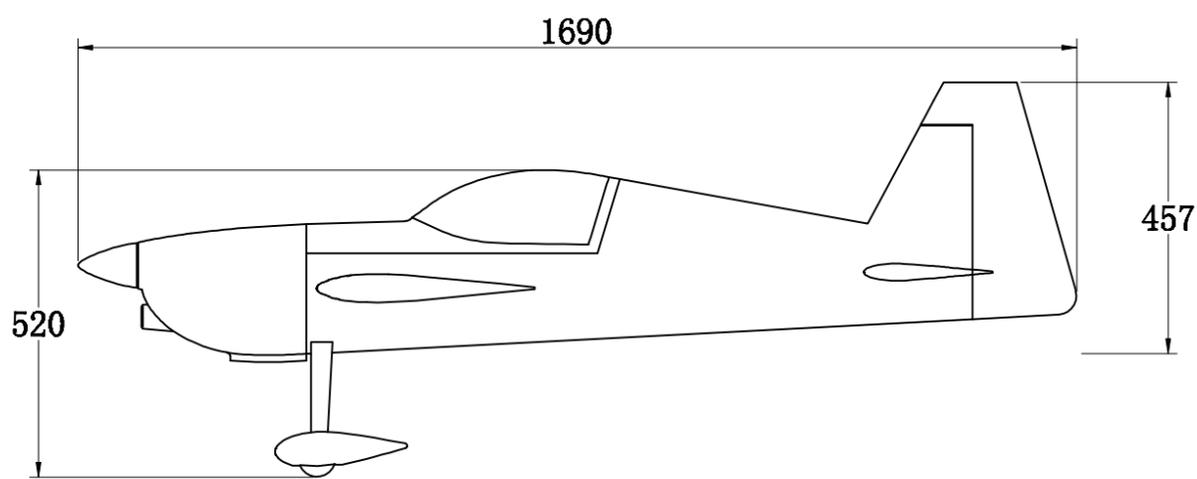

SPECS

WingSpan: 67"
Length: 66"
Wing area: 860 sq. in.

Spinner: 76mm INCLUDED
Weight: 8lbs
Pilot: 115mm X2 or Pilot X OPTIONAL

CENTER OF GRAVITY RANGE:

Center of wing tube for maiden, sport and precision flight.

CONTROL SETTINGS:

Elevator: Low Rate 10-12 deg. 15-20% expo
High Rate 45-50 deg. 50-60% expo
XA/Tumbling rate 55 deg. 65-70% expo
Aileron: Low Rate 15-20 deg. 40-45% expo
High Rate 38-40 deg 65-70% expo
Rudder: Low Rate 20 deg 50-60% expo
High Rate 45-50 deg. 60-80% expo

Power system:

Motor: T-Motor AM670
ESC: T-Motor AM116
Battery: 4000-5000mah (600-750g)
Prop: 18x8
Spinner: EF Cyclone 76mm INCLUDED

SERVOS:

4 x EF/Theta 989's or Savox 1261's
4 x EF 1.25" 25T M2 Arms

EXTENSIONS:

2 x Extreme Flight 6" 28AWG (Rx to Ailerons)
2 x Extreme Flight 24" 28AWG (Elevators and Rudder)

COVERING:

Oracover colors

Ultracote colors

Yellow/Red/Grey Scheme:

Light Grey 11
Cub Yellow 30
Black 71
Ferrari Red 23

Grey HANU882
Cub Yellow HANU884
Black HANU874
True Red HANU866

Blue/White/Orange Scheme:

Orange 60
Sky Blue 53
White 10
Dark Blue 52

Orange HANU877
Sky Blue HANU875
White HANU885
Midnight Blue HANU885

EXTREME FLIGHT