


# 70" SLICK 580v2

## 30-38CC / 12S

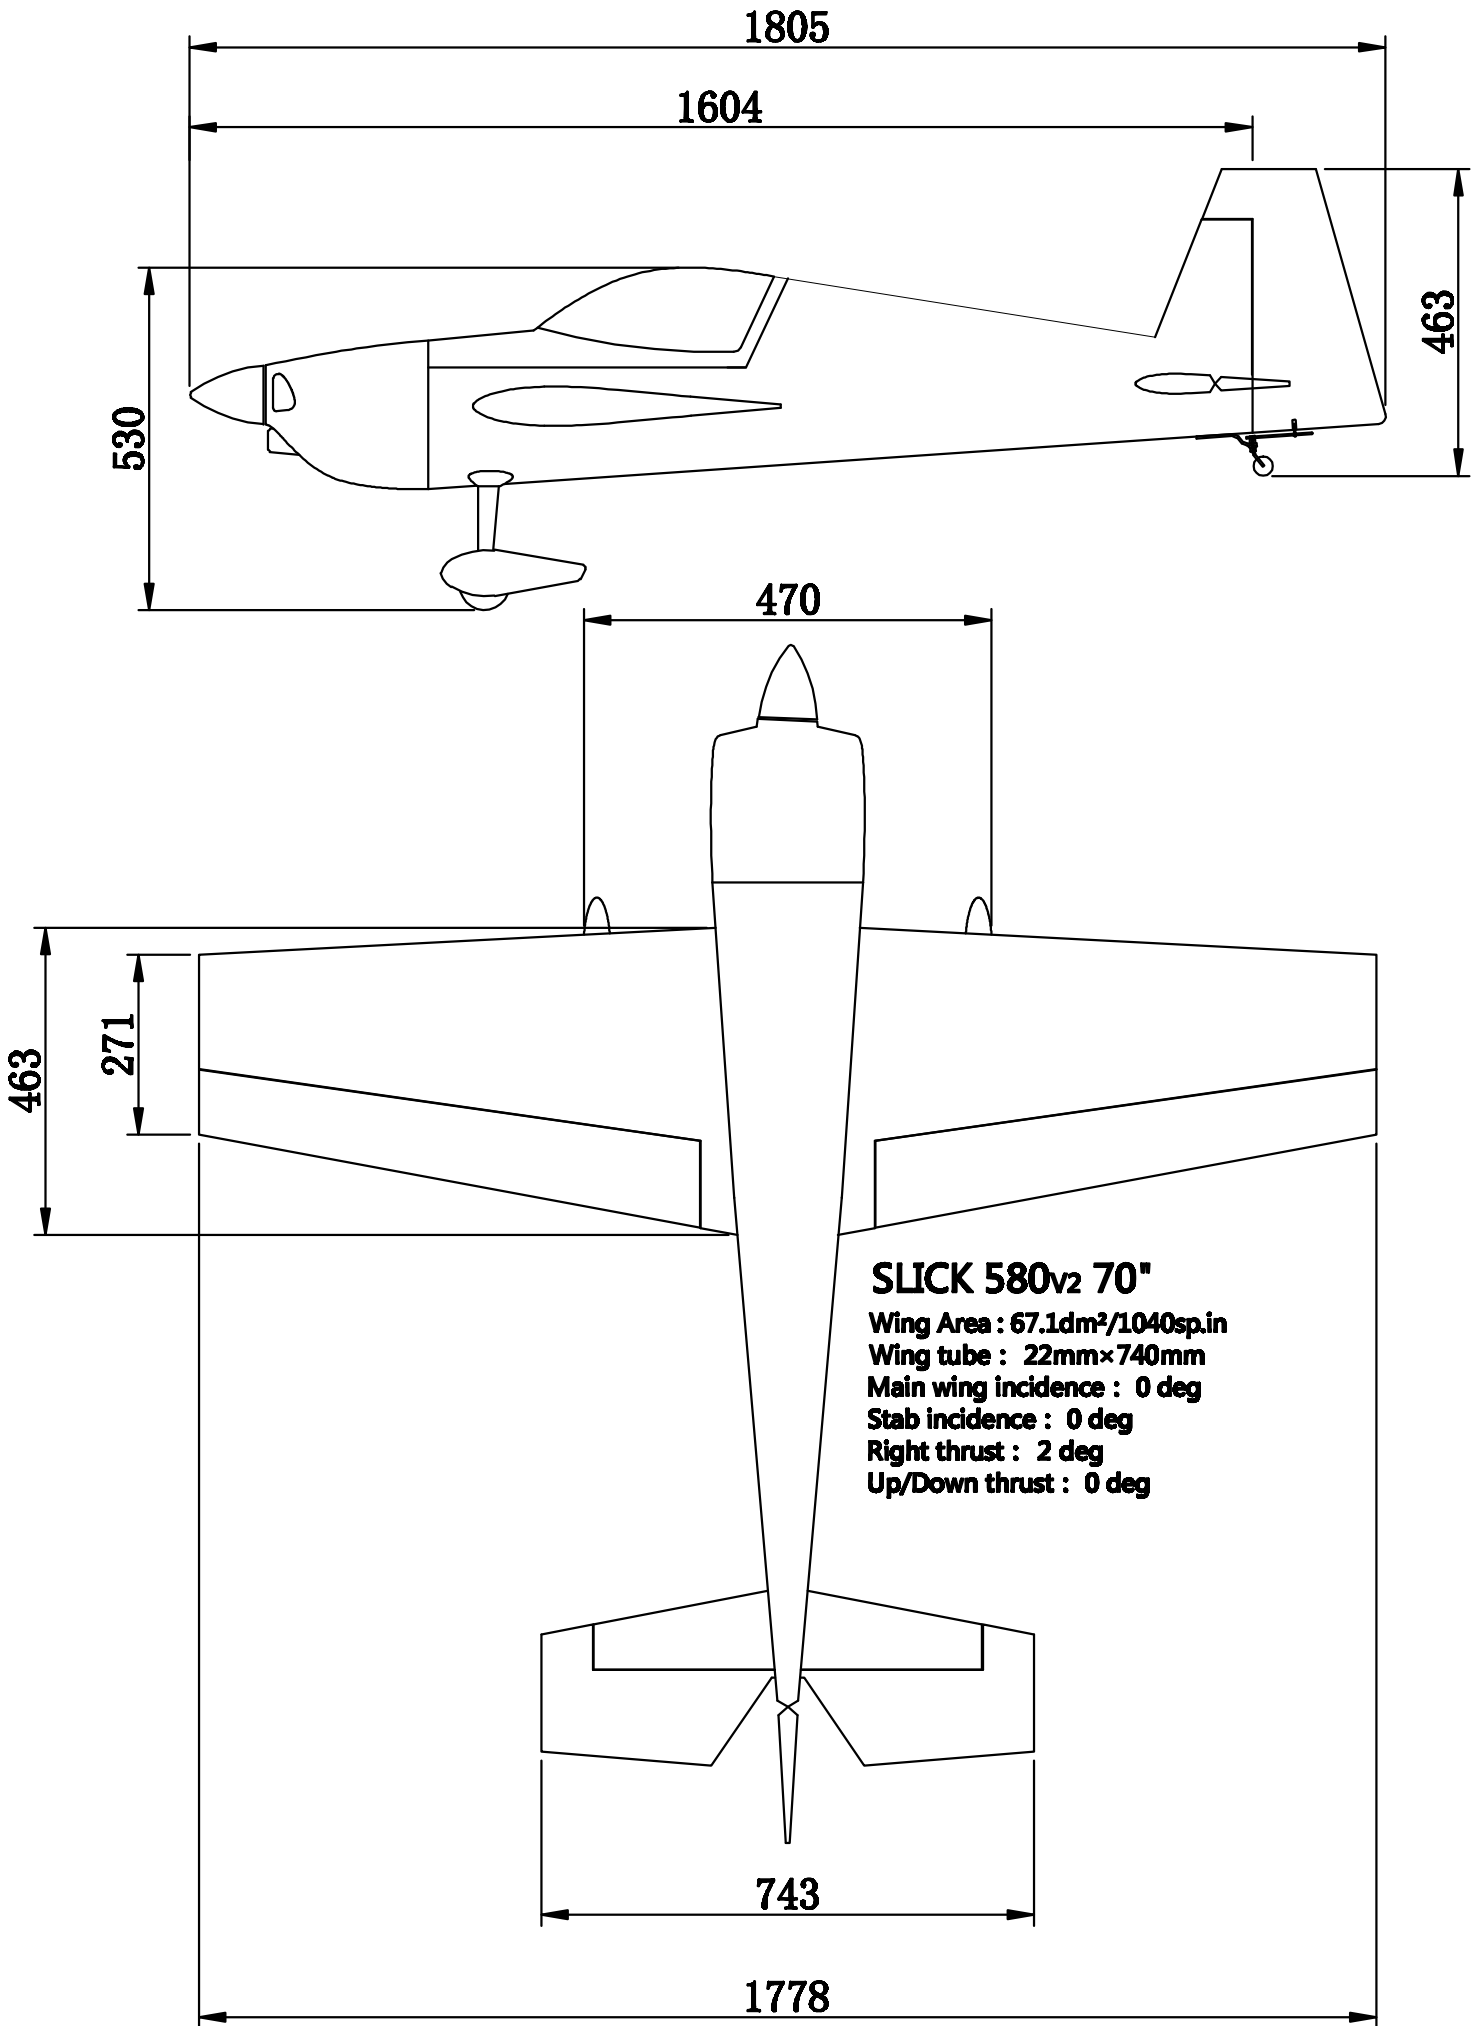

## SPECS

WingSpan: 70"  
 Length: 77"  
 Wing area: 1040 sq. in.  
 Center of Gravity Range (Measured from wing leading edge at root): 5-5.75" (127-146mm)

Spinner: 3.5"  
 Weight: 11 lbs.

### Control settings:

Elevator: Low Rate 8-10 deg. 15-20% expo  
 3D Rate 45-50 deg. 60-65% expo  
 XA/Tumbling rate 60+ deg. 65-70% expo

Aileron: Low Rate 15-20 deg. 40-45% expo  
 High Rate 38-40 deg. 70-75% expo

Rudder: Low Rate 20 deg 40-45% expo  
 High Rate 45-50 deg. 80-90% expo

### Power system:

GAS  
 Desert Aircraft DA 35 Prop: Carbon gas 20 x 8  
 Great Power GP-38 Prop: Carbon gas 20 x 8, 20 x 9  
 FlowMaster 14 oz. fuel tank

### ELECTRIC

Motor: Xpwr 32cc  
 Standoffs: Blazing Star standoffs  
 ESC: Castle Creations HV-120 Edge ESC (Must Use Firmware v 4.22) or Scorpion Tribunus II 130A  
 Battery: Two 6S 3000-3700 mAh batteries in series (12S)  
 Prop: 19x10, 20x8 wood or carbon electric

### Servos:

Qty. 4 full size, metal gear hi-torque servos. MKS HV-1220 or better  
 Qty. 1 throttle servo, MKS HV-1250 recommended.

Qty. 2 Extreme Flight 1.5 inch single servo arms (tapped 3mm) for ailerons  
 Qty. 2 Extreme Flight 1.5 inch single servo arms (tapped for 3mm) for elevator and rudder

### Servo Extensions:

Qty. 2 Extreme Flight 20 AWG 6 inch for Rx to Ailerons  
 Qty. 2 Extreme Flight 20 AWG 12 inch for Ailerons  
 Qty. 1 Extreme Flight 20 AWG 18 inch for Throttle servo  
 Qty. 2 Extreme Flight 20 AWG 36 inch for Elevators and rudder

### COVERING:

#### Oracover colors

#### Blue/Orange Scheme

Dark Blue #52  
 Sky Blue #53  
 Orange #60  
 White #10  
 Black #71

#### Ultracote colors

Midnight Blue- # HANU885  
 Sky Blue - #HAN875  
 Orange - #HAN877  
 White-# HANU870  
 Black-#HANU874

#### Yellow/Red/Grey Scheme

Light Grey #11  
 Cub Yellow #30  
 Black #71  
 Ferrari Red #23

Grey #HANU882  
 Cub Yellow #HANU884  
 Black #HANU874  
 True Red #HANU 866

# EXTREME FLIGHT X