

88" Extra 260



***EX*TREME FLIGHT **

Please read the following paragraph before beginning assembly of your aircraft!

THIS IS NOT A TOY! Serious injury, destruction of property, or even death may result from the misuse of this product. Extreme Flight RC is providing you, the consumer with a very high quality model aircraft component kit, from which you, the consumer, will assemble a flying model. It is beyond our control to monitor the finished aircraft you produce. Extreme Flight RC will in no way accept or assume responsibility or liability for damages resulting from the use of this user assembled product. This aircraft should be flown in accordance to the AMA safety code. It is highly recommended that you join the Academy of Model Aeronautics in order to be properly insured, and to operate your model at AMA sanctioned flying fields only. If you are not willing to accept ALL liability for the use of this product, please return it to the place of purchase immediately.

Extreme Flight RC, Ltd. guarantees this kit to be free of defects in materials and workmanship for a period of 30 DAYS from the date of purchase. All warranty claims must be accompanied by the original dated receipt. This warranty is extended to the original purchaser of the aircraft kit only.

Extreme Flight RC in no way warranties its aircraft against flutter. We have put these aircraft through the most grueling flight tests imaginable and have not experienced any control surface flutter. Proper servo selection and linkage set-up is absolutely essential. **Inadequate servos or improper linkage set up may result in flutter and possibly the complete destruction of your aircraft.** If you are not experienced in this type of linkage set-up or have questions regarding servo choices, please contact us at info@extremeflightrc.com or 770-887-1794. It is your responsibility to ensure the airworthiness of your model.

Please read over the manual completely before beginning. This will give you an overall understand of the assembly process and familiarize you with the tools and supplies you will need.

Extreme Flight constantly upgrades and improves its products. Hardware and details may change, but the basic process remains the same. If you are confused about a step, please call or email us at the contact information on our website, we will be glad to help.

1. Unpacking and Sealing Covering

Your aircraft has been on a journey around the world since it left our factory. Although the covering material was perfectly smooth when it was boxed up, changes in weather and humidity may have wrinkled the covering material. For certain, wrinkles will appear in the covering once you have unpacked your aircraft and it adjusts to the atmospheric conditions in your region. Learning to remove wrinkles from covering is a necessary skill to maintain your wood aircraft.


Your Extreme-Flight produced aircraft is covered in Ultracote covering material (US market name), also called Oracover in global markets. If you need replacement covering to repair damage, Ultracote/Oracover is widely available from retail hobby suppliers. Also, each roll of Ultracote/Oracover includes excellent instructions which are also available online. Please refer to them for details about working with and/or repairing your covering.

The basic tools are a covering iron and a hobby heat gun. Start by using the iron at 220F (104C) to seal all of the edges on the covering scheme. This is CRITICAL on the leading edges of wings and stabilizers. Then use the iron at 300F (149C) or a heat gun to shrink out any wrinkles in the covering. Remove the plastic canopy from the aircraft when using a heat gun to protect it from heat damage. GO SLOWLY AND CAREFULLY to avoid over-shrinking or burning the covering. This is a skill which takes a bit of practice. There are many tutorial videos online demonstrating shrinking wrinkles from Ultracote. IF YOU ARE INEXPERIENCED WITH COVERING, WE RECOMMEND TO USE ONLY THE IRON AT FIRST. THE HEAT GUN WORKS VERY FAST AND YOU MAY NOT BE ABLE TO REACT QUICKLY ENOUGH.





2.Landing Gear


The Extra 260 uses a carbon one-piece landing gear which sweeps *slightly forward* when installed properly.

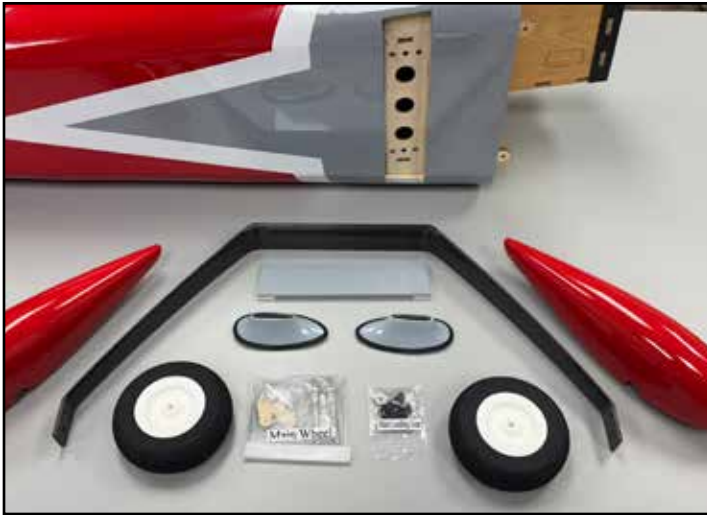

The gear attaches to the fuselage with four screws and washers as shown. Use blue threadlocker here. Install the cosmetic cover plate with ruberized glue as shown. We prefer Gorilla Clear Grip, Goop is an acceptable substitute.

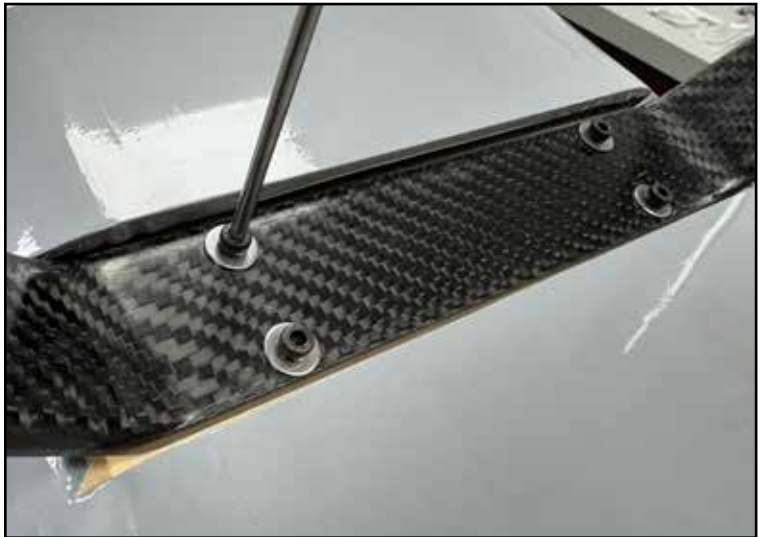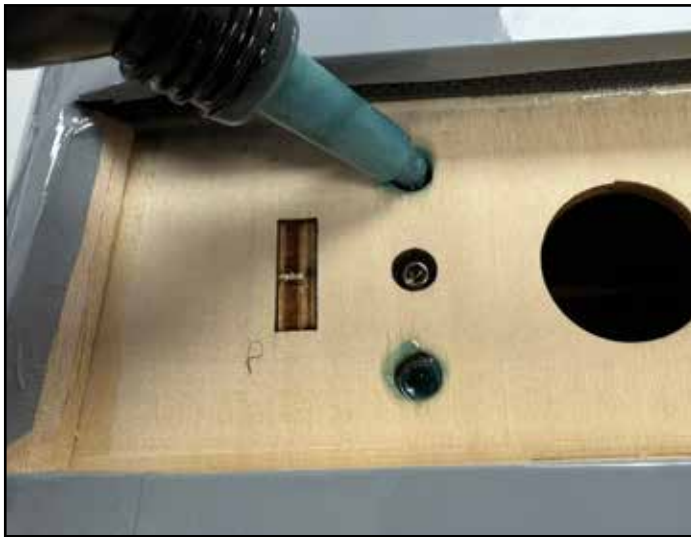


Your kit includes fiberglass landing gear fairings. Test fit them onto the landing gear. Open the slot in the fairing as necessary to fit the gear leg. Test the fairings on both sides to find the best fit. Mark the end of the fairing with a marker as shown. Lightly sand and clean this area with solvent. Add a large dollop of rubberized glue. We prefer Gorilla Clear Grip adhesive. GOOP adhesive is a good substitute. Tape the fairings in place and allow to cure.

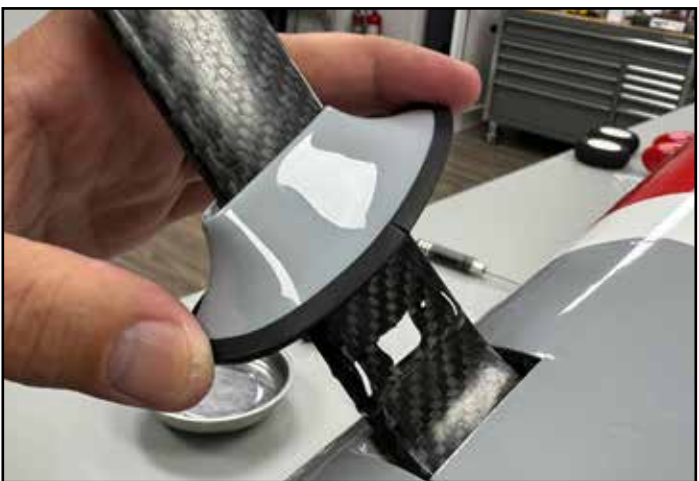

The wheel axles are attached to the landing gear with washers and locknuts. When tightening, make sure the flat spot machined into the axle tip points **DOWN**, toward the runway. If you wish to run **BARE WHEELS** (no wheel pants) use the conventional wheel collars as shown.



If you wish to run wheel pants, assemble and install the wheel-pant-mounts/wheel collars as shown. Two wood screws attach the wooden wedges to the aluminum body as shown. Scuff the face of the wood wedge. Assemble onto the axle and use blue threadlocker on the set screw. Apply adhesive (we recommend Gorilla Clear Grip or Epoxy) to the face of the wheel pant mount as shown.

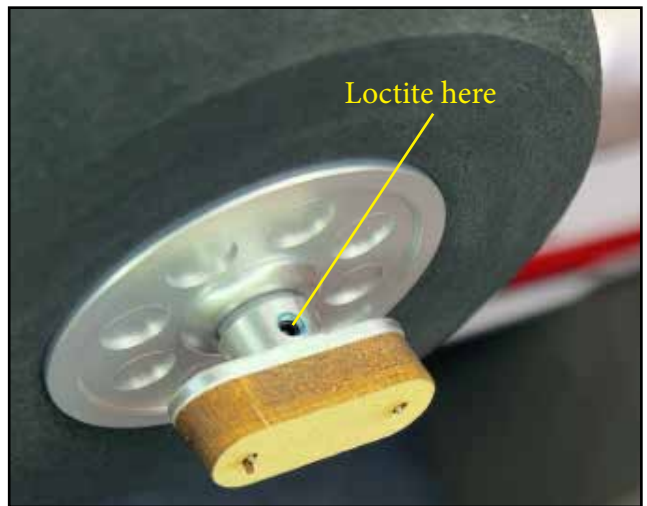

Install the wheel pant over the wheel and axle, tighten to the landing gear with screws as shown, using blue loctite. The wheel pant support should sit against the pant as shown. By stabilizing the pant, this design lengthens the life of your wheels pants. Just like on full-size aerobatic aircraft, however, wheel pants take a lot of abuse and over its life your aircraft will probably need a replacement set.



3. Tailwheel

Install the tailwheel onto the fuselage with blue threadlocker. Locate the mounting hole in the bottom of the rudder and install the tiller holder (a plastic ball joint) with epoxy as shown. Attach the tailwheel with loctite. For very best geometry, make a slight bend in the tiller wire as shown.



4. Rudder installation

The 88" Extra 260 arrives with control horns installed and with the wings and stabilizers pre-hinged and gap-sealed. The rudder is quick-release type using a wire hinge. Take your time aligning the rudder and fuselage, then insert the hinge wire through the top of the rudder. Carefully feed the wire down through the hinges and screw into the top of the rudder as shown.




5. Elevator servos

Remove the wooden number plate over the servo location as shown. We prefer to add a single drop of thin CA glue to each of the servo screw mounting holes. Begin to install the servo by threading the wire through as shown. The first time you install an elevator servo into an interior mount like this, it can be a challenge. Be patient and you'll succeed. Note that if your servo has an oversized case, you may need to sand or file the opening to match.





Install the servo arm, and install the pushrod, using bolts, washers, locknuts, and tapered spacers on the servo-arm end as shown. For most installations, depending on transmitter/receiver/servo type and brand, you can use the 1.75" location on the 2" arm, and maximize end points to achieve the desired throws. Maximizing endpoints and using the shortest possible arm length maximizes effective torque and resolution.

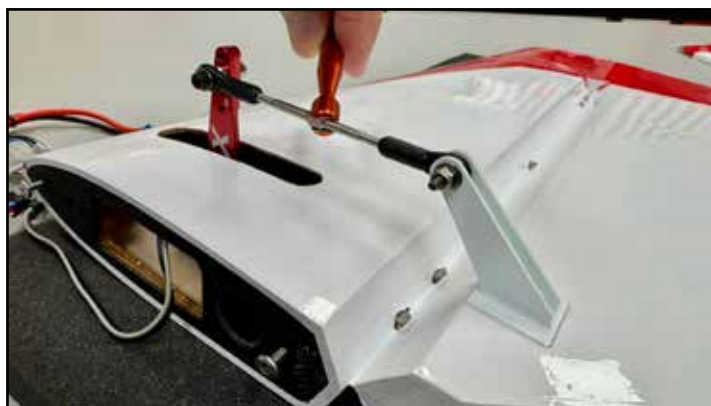

6. Aileron Servos

Again, we prefer to add a single drop of thin CA to each servo mounting screw location. Run the servo wire through the tube in the wing interior as shown. Mount the servo as shown, and install the arm and pushrod. Use the cone-shaped spacer between the ball joint and servo arm, as shown. See the photo for the CORRECT orientation of these parts once installed. The servo linkage is "crooked" at the neutral/center position. This is correct, so that the linkage will be aligned within specs when fully deflected. At full deflection is when stresses are highest, that's the important position.

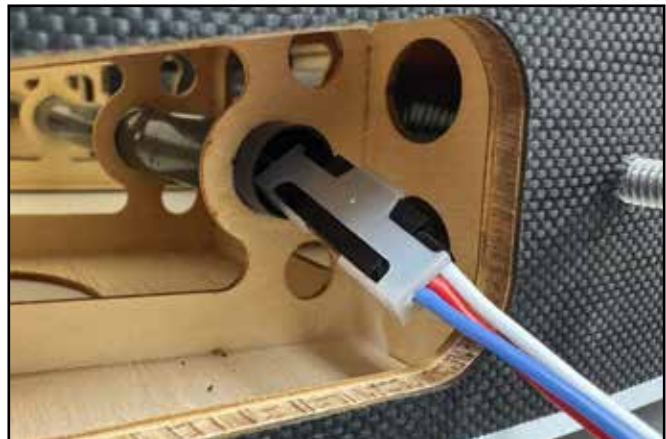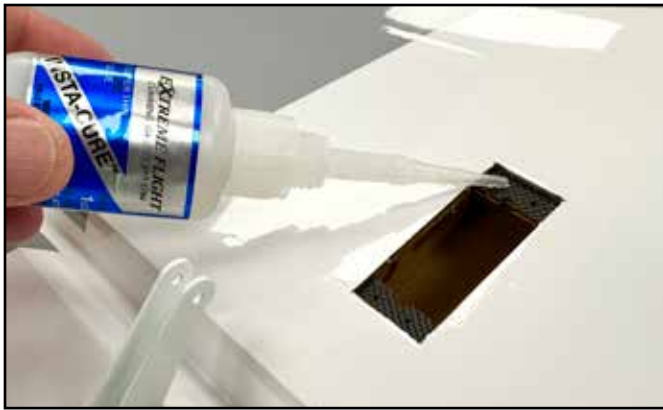

7. Rudder Servo

Install the pushrod as shown. Open the rudder servo opening as needed.

There is a plastic tube installed in the fuselage to contain the extension wires for your rear servos, for the elevators and rudder. Run your extensions through the tube to the receiver in the front. Sometimes it can be helpful to feed a wire or other tool through the tube from the front and pull the extensions through. Electrical solder is an excellent choice for this, with its combination of stiff and soft, it is easily fed through the tube and strong enough to pull extensions through. This is also the correct step to install your elevator extensions and pull all three together as a group.




Install your rudder servo and arm. Attach the pushrod as shown, using the cone-shaped spacer on the servo-arm end of the pushrod.



8. Power system mounting

No matter what kind of power system you install into your 88" Extra 260, you will need to set its total length at 167-170mm for correct fit. Utilize the correct mounting spacers and shims for your system, test fit your cowl with spinner and prop to confirm that you have adequate clearance and no interference.

Note that your kit is designed with 3 degrees of RIGHT thrust on the motor mount. This is a correct and by design. All of our Extreme Flight aerobatic aircraft use 2-3 degrees of right thrust to counteract prop effects and give the lowest pilot workload.

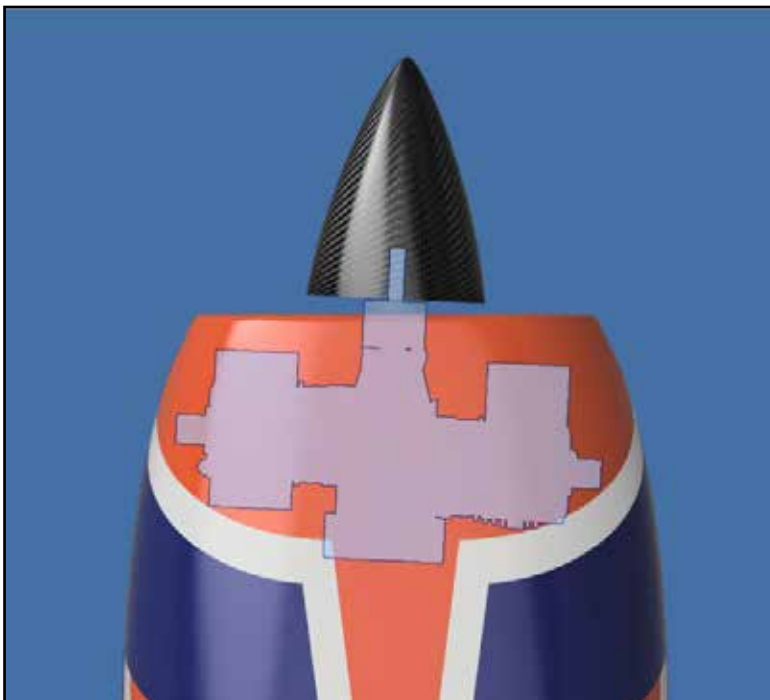

9. Electric power

88" Extra 260s are excellent candidates for electric power with the XPWR60CC brushless motor and 12S 5000-6000mah lipo batteries. Use our BlazingStar X-Large standoff set. The XPWR60CC motor has the same mounting bolt pattern as the GP-76/DA-70 gas engines. Drill the holes in the firewall on the pre-marked locations, first with a small drill bit such as 2mm or 1/16", then finish with the final size bit. Use blue loctite on all of the motor mounting screws.

Our favorite ESC for this application is the Castle Creations Edge HV 160. When we introduced the XPWR35-60CC motors, we worked with Castle technicians to create a compatible firmware for Castle ESCs which was lab tested on these motors. This is Firmware 4.22. We recommend that you backdate your Castle ESC to firmware release 4.22 using your Castle Link and a computer. This will ensure smooth operation. All other settings remain at default. We prefer to mount our ESC on the bottom of the motor box.

We have also tested the 88" Extra 260 on the prototype T-Motor AM910 outrunner and matching ESC system. It is excellent. As of this writing, these units are due to be introduced in Summer 2025. Photo below.

For motor cooling, the molded cooling outlet in the bottom of the cowl is more than sufficient, but you can add the canister exhaust cooling outlets detailed in that section of this manual if desired. To cool batteries, we recommend leaving the motor-box top-plate OFF, creating a large airflow path into the top of the motor box and into the battery area. In testing, we have run the 88" 260 often with no cooling air exit for the battery air, and achieved acceptable battery temperatures when using good quality lipos. However, you may wish to open a cooling outlet on the bottom of the fuselage behind the exhaust tunnel to evacuate air from the battery area, by removing a section of covering. There is a rear vent location provided for tuned-pipe exhaust exit, this is a handy location also for a battery air vent.

We prefer a carbon 24x12 or 25.5x13 electric prop for this application.




10. Gas Twin 70-76CC Power



A 70-76CC gas twin is an excellent engine choice for your 88" Extra 260. Here we show the installation of the GP76CC.

We recommend the use of our BlazingStar engine mounts. The firewall of your 260 already has the correct amount of right-thrust and up/down thrust built in, so there is no need to adjust or shim this in the installation. Drill the firewall on the provided marks. Use large washers and nylon locking nuts on your engine-mounting screws to prevent anything coming loose from vibration.




Locate the throttle pushrod, drill your engine's throttle arm if necessary, and install using a locking nut.

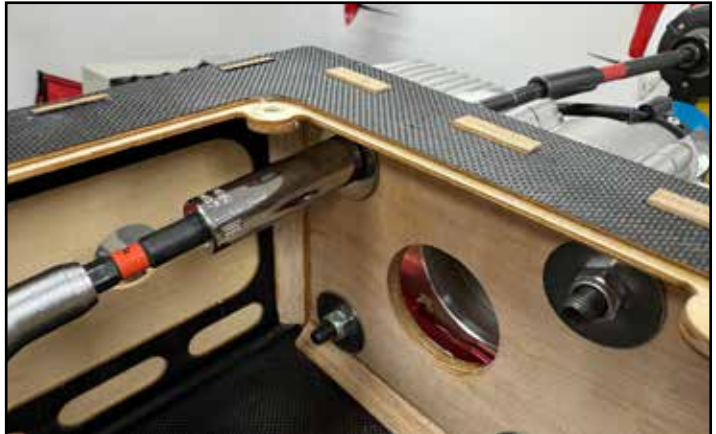

The 88" Extra 260 uses a full-size throttle servo with a 1" arm. There are two generic throttle servo locations provided, one for right-hand and one for left-hand carburetors. To get the best linkage geometry with our install, we elected to use the plywood servo mount pieces included in the kit and custom-mount the servo as shown.

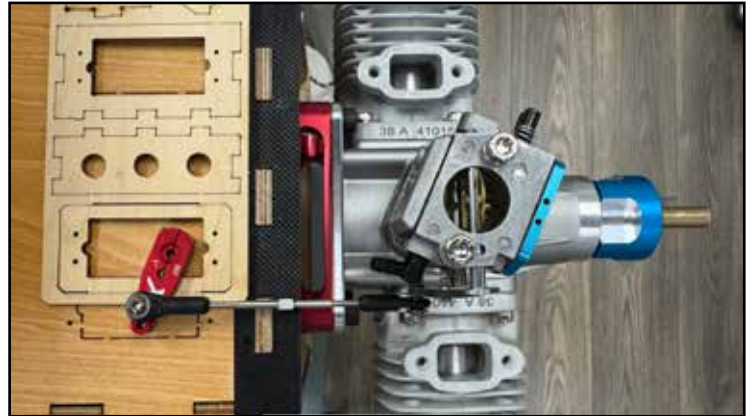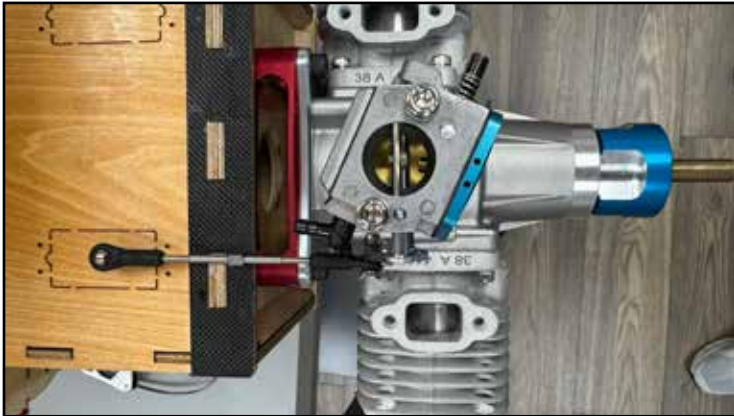


The 88" Extra 260 includes a clear-plastic cowl marking tool to mark and cut the cowl accurately if you are running "stock" mufflers which exit through the cowl. First, mark and drill the clear tool for the cowl screw holes as shown. The tool allows you to accurately locate the tool on the cowl and over the engine. We use hex-driver tools to hold the tool in place over the engine and mufflers for marking. Study these photos carefully. Once the marks are perfect, cut the tool and verify fit over the muffler pipes. Place the tool over the cowl, mark the cowl, and cut. Be sure to wear eye protection and work in a well-ventilated area with a dust mask. NOTE: if you are running stock mufflers, we include a block-off plate you can install as shown over the entrance to the exhaust tunnel, this cover is removable for access to the interior of the tunnel if needed to arrange velcro straps, etc.

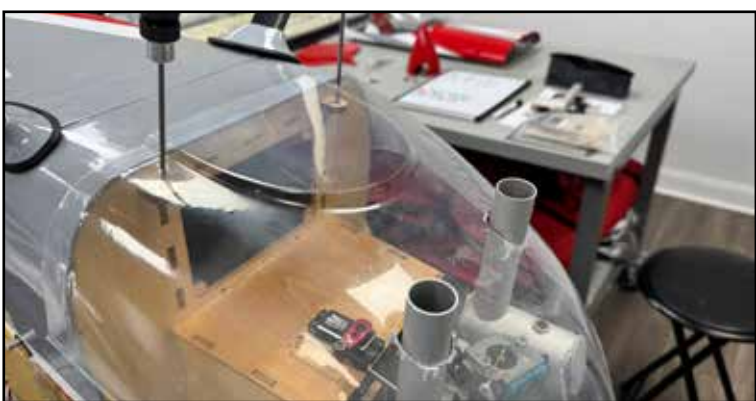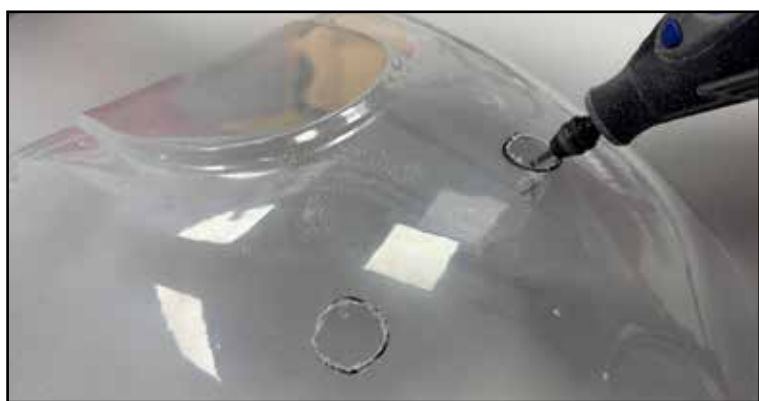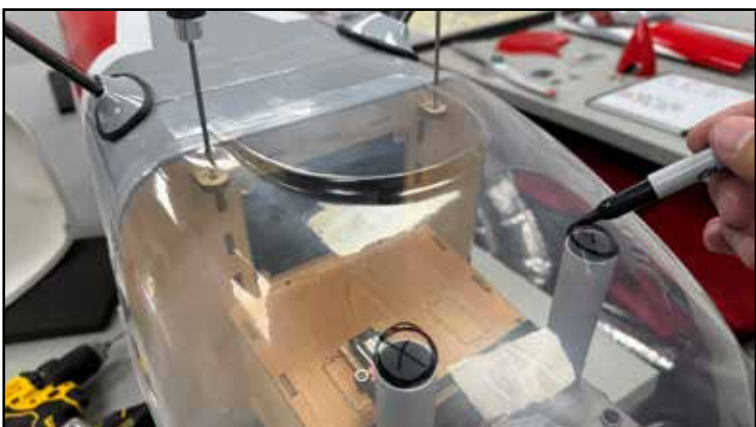

11. Canister muffler (or tuned pipe)




The 88" Extra 260 can also fit an MTW Y-header for DA-70CC (which also works for the GP76CC) and TD-110H rear-exit canister muffler. Begin by removing the covering over these locations on the bottom of the fuselage. Seal the covering afterwards with your iron as shown. These cooling outlet plates attach with screws. If you use a very sharp blade and do a perfect job of removing the covering sections, then...

For extra points, it is possible (but requires some patience) to re-iron the covering section you have removed onto the bare wood side of each plate to create color-matched exhaust vent plates. For removing the covering inside the vent areas, we prefer to use a soldering iron tip to melt the covering.

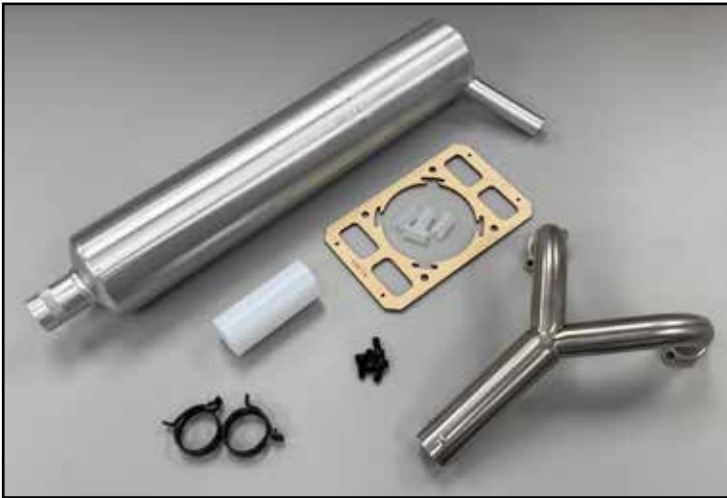

Install the silicone tubing sections onto the canister mount as shown. Install the canister mount into the exhaust tunnel with loctite on the screws. Slip the canister muffler into place, and install the cover plates. We like to use "Ultra Copper" sealant on the flanges of the exhaust header to seal. Install the exhaust header and coupler tube into the canister muffler. For increased reliability, we like to drill and screw through the coupler pipe into the header and muffler with small sheet metal screws as shown, then place the clamps in their final position over the screws.




Installation of a tuned pipe exhaust is similar. A mount is built-in to the aircraft structure at the rear of the fuselage, install the silicone tubing mount bumpers as on the canister mount, and remove covering over the appropriate outlet. Also, remove a section of foam at the rear of the tunnel to allow the pipe to pass through.

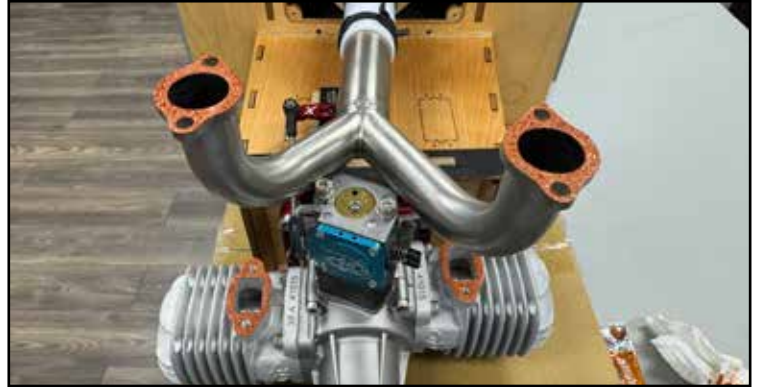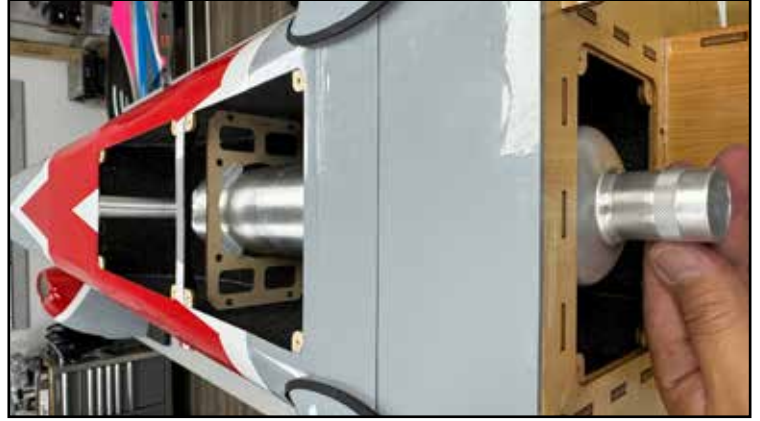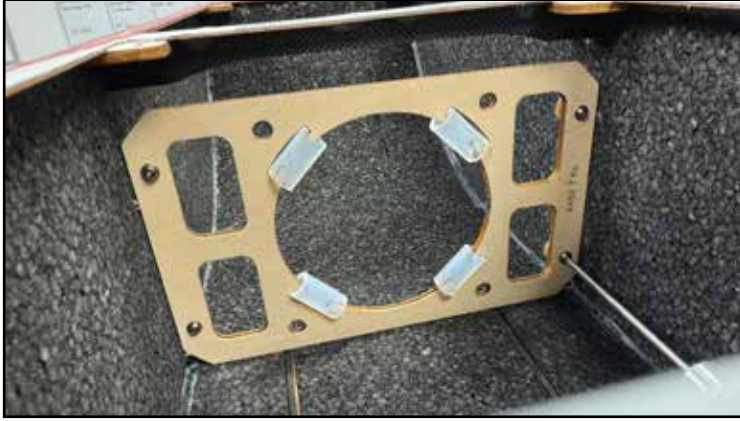



12. Fuel System

The 88" Extra 260 typically uses one 24oz. Extreme Flight Flowmaster fuel tank for fuel, and a second 24oz. Flowmaster for smoke if desired. The tanks are secured with a self-adhesive velcro strip on the bottom and 2-3 strong velcro straps around the tank. Note that the "vent" line is looped, this is to prevent fuel siphoning out during aerobatic maneuvers. Also note that it is generally a good idea to have a stiffened section in the internal fuel "clunk" line inside the tank. The tank kit includes a brass tubing section for this purpose; an even easier way to provide this stiff section is to slip a piece of a large drinks straw over the clunk line, see photo. For gasoline only, mount the tank on the centerline of the aircraft. If also using smoke, mount side-by-side.

See photos for how we use a short section of fuel line as a "clamp" on the tank clunk, tanks barbs, and carburetor barb. Check the tightness of all fittings on the tank before final install.

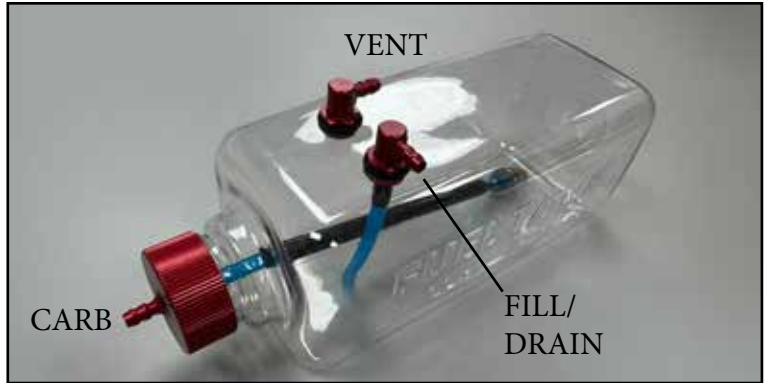
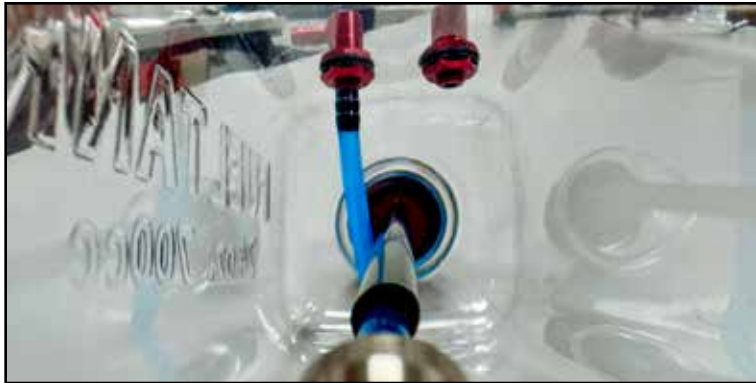
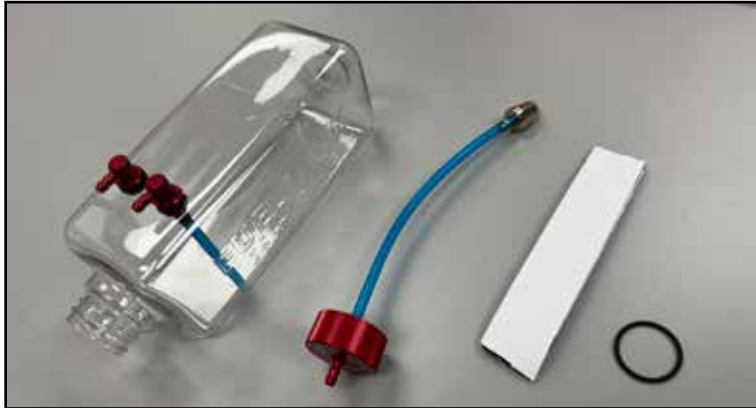


Mount the tank with a strip of self-adhesive velcro to the equipment tray just in front of the wing spar tube. We like for the tank to be as close to the tube as possible to minimize CG changes during flight as the tank drains. Cut slits in the foam as shown to encircle the tank with velcro straps. Mount your fuel dot to the fuselage side as shown (in this case we are using an Extreme Flight magnetic dot, which is large diameter and requires enlarging the hole a bit). Attach the fill/drain line to the dot, cut a slit in the foma as shown and run the vent line in a loop around the top of the tank (this helps to prevent fuel siphoning in flight) then down to the bottom of the aircraft. You can simply pass the line out of a hole in the bottom of the fuselage, but for a cleaner installation we have opted for an Extreme Flight fuel vent dot as shown.

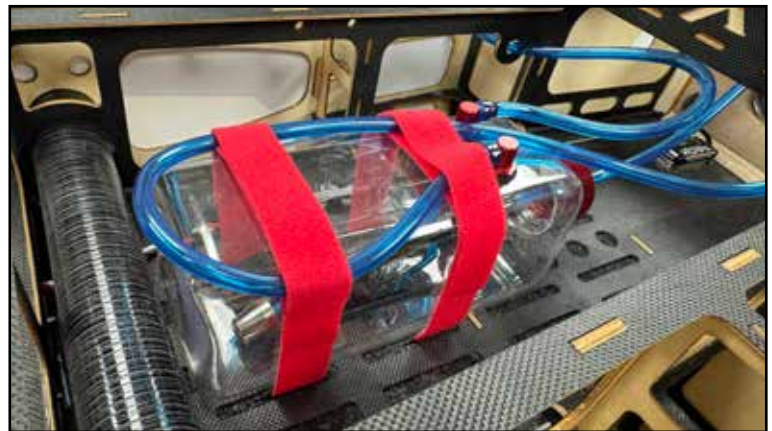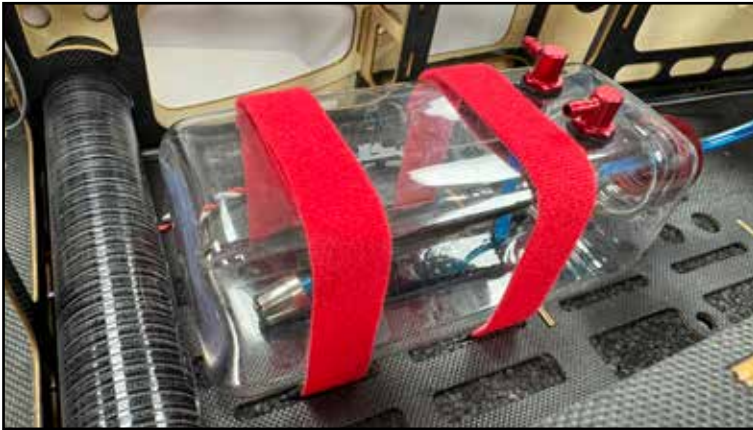

13. Ignition system

To save weight and complexity, we prefer to use an ignition-battery eliminator circuit (IBEC) such as the Tech-Aero or comparable unit, instead of a separate ignition battery. A good location for your twin-cylinder ignition unit is inside the motor box as shown. Remove the two slot pieces in the motor box top plate and attach the ignition with velcro. Use heat-shrink tubing or servo plug locks on all of these critical connections as appropriate. Run the ignition wires as shown, we recommend the use of 3M brand wire anchors as pictured for organizing wiring and tubing. Install the top plate using loctite.

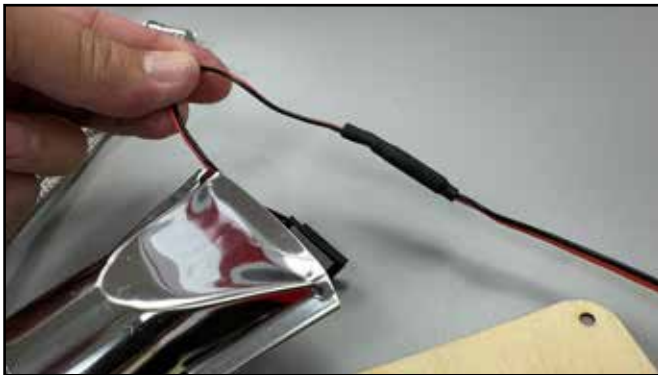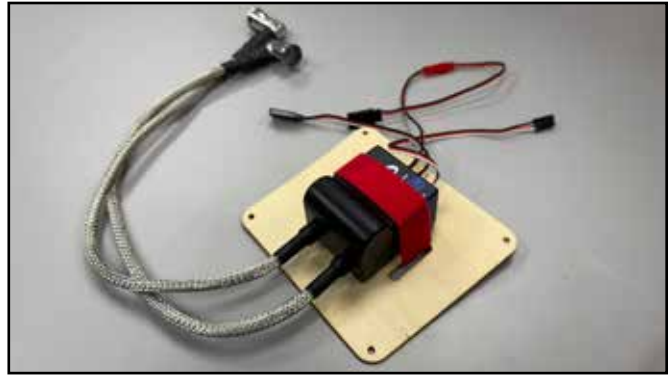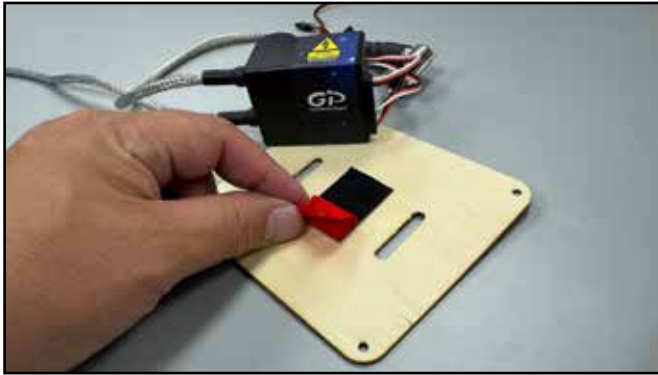

14. Cooling

For gas twin cylinder installations, install the provided cooling duct into the front of the cowl as shown. You can use epoxy or rubberized glue such as Gorilla Clear Grip or Goop. The duct is extra long, to allow you to trim as appropriate if your engine is right-cylinder-forward or left-cylinder-forward. The cowl has a large molded-in cooling outlet which is more than sufficient. If you are using stock mufflers, install the cover plate over the exhaust tunnel. If you are using the canister muffler, be sure the vent holes on the bottom of the fuselage are opened.





For electric power, we recommend to modify the baffle with balsa wood or foam as shown (by adding the plates colored green in the diagram). Delete the cover plate on top of the motor box to allow air to flow to the batteries. The cooling outlet on the bottom of the cowl is sufficient exit for the cowl air, but you can also open the cooling vents on the bottom of the fuselage. In testing, we have run the 88" 260 often with no cooling air exit for the battery air, and achieved acceptable battery temperatures when using good quality lipos. However, you may wish to open a cooling outlet on the bottom of the fuselage behind the exhaust tunnel to evacuate air from the battery area, by removing a section of covering. There is a rear vent location provided for tuned-pipe exhaust exit, this is a handy location also for a battery air vent.






14. Final Assembly

Install spark plugs. We prefer to use the thickness of a common X-acto knife #11 blade to set our plug gap. Install the cowl. The provided fasteners for the bottom have washers and rubber O-rings. We have here upgraded to Extreme Flight aluminum washers. Use loctite on the upper cowl screws. Here we have opened the aileron servo plug locations in the fuselage and used MPX servo connectors. Install your receiver and, route and tie all wiring and restrain your antenna(s) according to you radio mfg. directions.

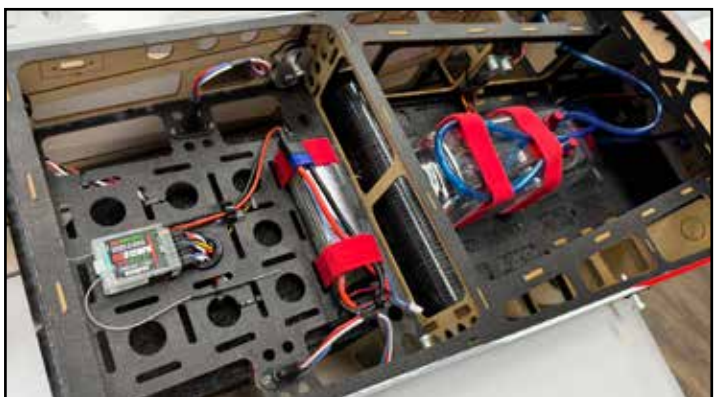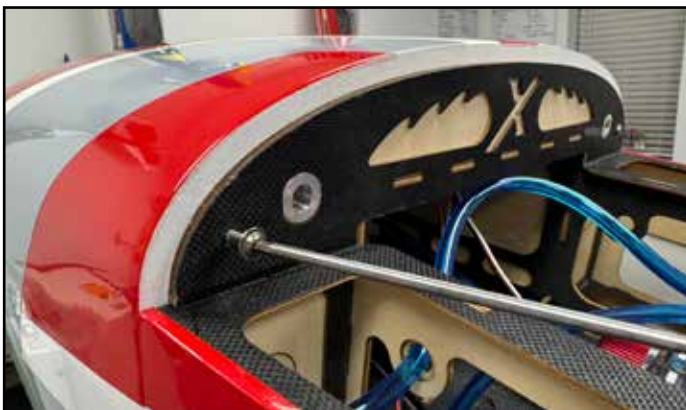

Assemble the major parts of the aircraft. Insert the carbon spar tubes for the wing and stab and slide the stabs on. Use a servo wire lock on the servo connection. Open the latch, fully seat the stab, then close the latch. Open the wing latch (the black plastic "flag" will pop up) and fully seat the wing. If you wish to tighten or loosen the fit of the wing, rotate the wing screw as shown. Check the tightness of the pilot figure as shown.

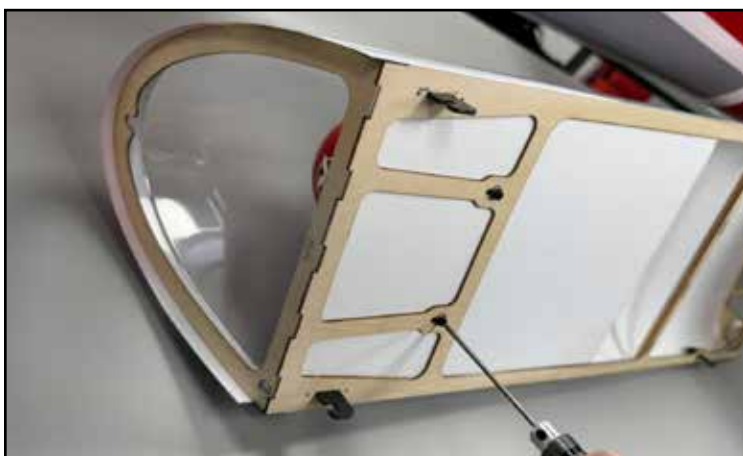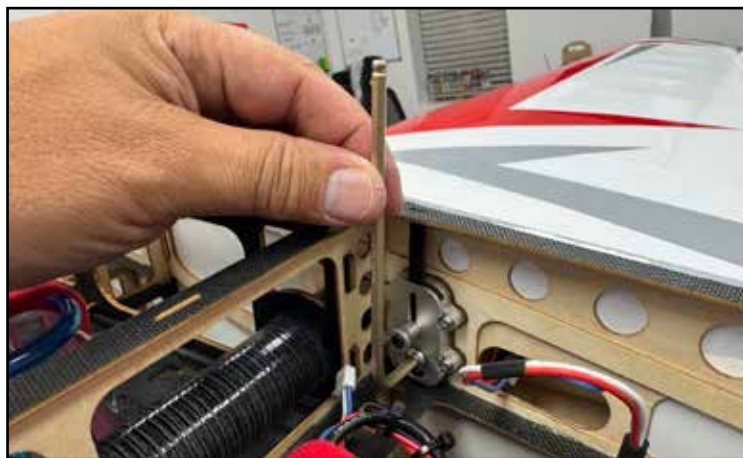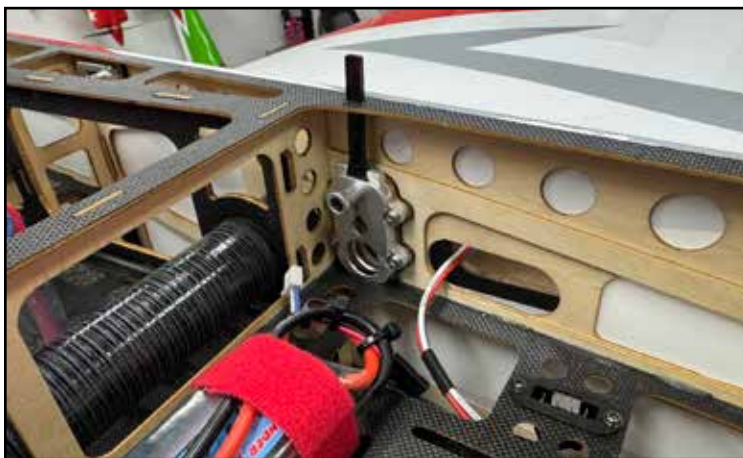

15.SFGs

The 88" Extra 260 includes quick-release SFGs. The purpose of SFGs is to increase stability in slow 3D maneuvers. We recommend that you fly with and without them to feel the difference; we prefer to fly with SFGs ON. Attach the keyhole washers to the SFG's with rubberized glue as shown. Place the clear plastic spacer on the wingtip as shown. It is not necessary to fully remove the screws to mount or dismount the SFGs. Just loosen the screws a bit, slide the SFGs on, and tighten.



16. Gas Prop and Spinner



For gas, use a jig as shown to drill your prop and spinner for your engine prop bolt pattern. We prefer to drill the prop and spinner backplate at the same time if possible.



17. Balancing

Balancing the 88" 260 is very simple. The preferred CG for aerobatic flight is on the center of the wing tube. With the aircraft fully assembled, but with canopy hatch OFF, lift the aircraft by the point shown, directly above the wingtube. The aircraft should hang level.

Below are photos of equipment layouts for both gas an electric setups, at our preferred.

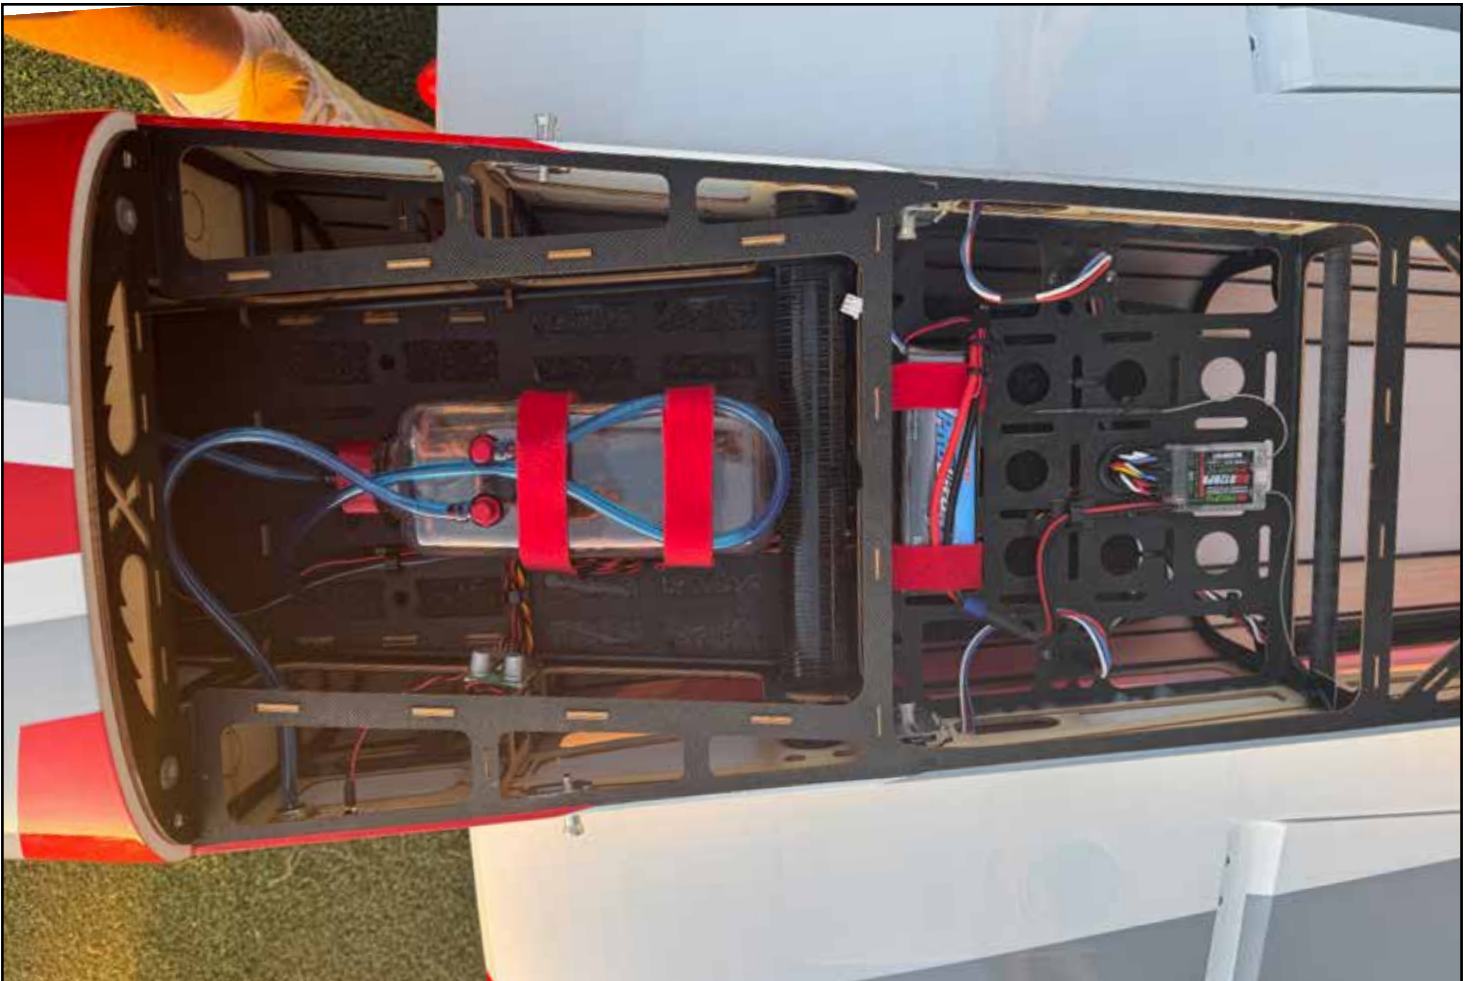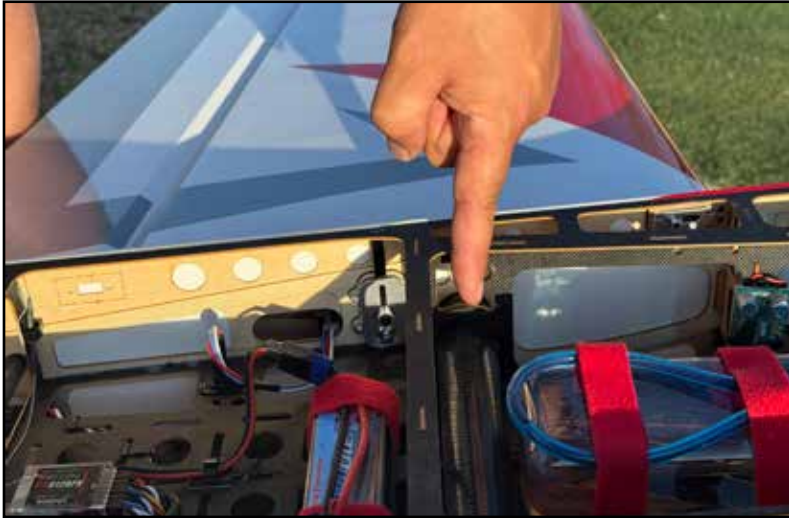



18.Control Throws

Set the control throws. Be sure to add adequate EXPO and be sure each surface is moving in the correct direction. There are various kinds of throw-meters available for this purpose, but our favorite is the smart phone most of us carry every day. Use a "level" app (most phones come equipped with one) and hold the phone against the control surface to measure deflection.

Aileron Low: 15 deg up, 15 deg down 18-20% exponential
High: 37 deg up, 36 deg down 50-60% exponential

Elevator Low: 10-12 deg 18-20% exponential
High/3D: 50-55 deg 50-60% exponential

Rudder Low: 20 deg 50-60% exponential
High: 45+ deg 60-80% exponential

NOTES: Even with SFG's installed (our preferred setup) 37/36 degrees of aileron gives a very fast roll rate. Try it before deciding to add more.

In our testing, 55 degrees of elevator is perfect. We prefer to set the elevator at 55 degrees of high rate and use Expo to tune the feel around center.



19.Repairs

If you need to make repairs, every component of the Extra 260 is available as a replacement part.

If you need to repair the covering, here are the color codes for the material in both the Oracover and Ultracote naming systems:

Oracover colors

Red/Grey Scheme

Ferrari Red #23

White #10

Light Grey #11

Blue/Orange Scheme

Dark Blue #52

Orange #60

White #10

White/Blue Scheme

Dark Blue #52

White #10

Ferrari Red #23

Ultracote colors

True Red-#HANU866

White-# HANU870

Grey #HANU882

Midnight Blue- # HANU885

Orange - #HAN877

White-# HANU870

Midnight Blue-#HANU885

White-# HANU870

True Red-#HANU866

Check the "Tech Tips" section of the Extreme Flight website for the latest information on matching paint availability.

We recomment to clean your aircraft after flight with a good quality glass cleaner to remove all oils and grease, and to periodically wax your aircraft with a good quality spray wax/detailer.

